

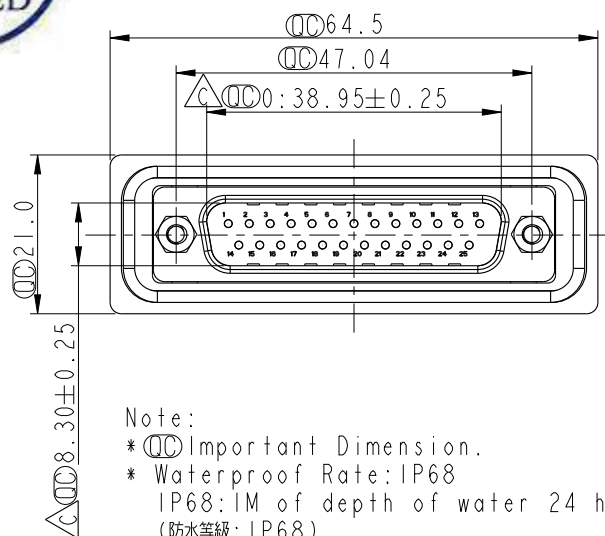

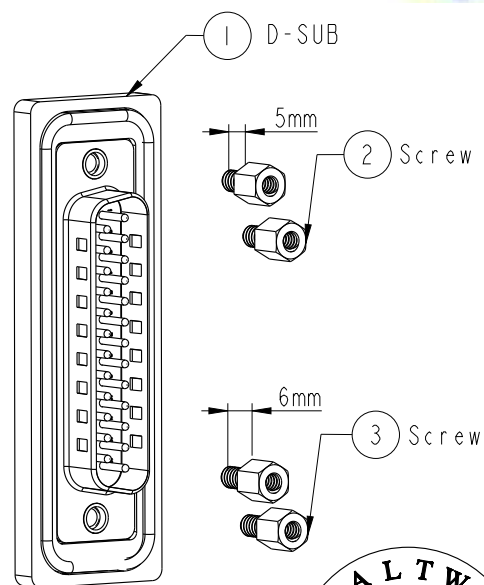
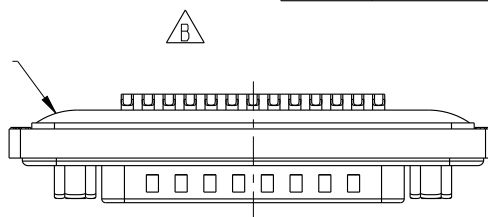


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-980002	2009/07/29	Vicky	Remove Pin Dim.
C	LEN1350284	2013/05/31	Yulong	Update the Dimension




Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate: IP68
IP68: 1M of depth of water 24 hours
(防水等級: IP68)
(IP68: 1米水深24小時)
- * Do Mating Test After Glued
點膠後, 須作對插測試
- * Housing: Nylon+GF, Black.
- * Connector: PBT, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Ring: Silicone, Light Blue.
- * Screw: Copper Alloy, Nickel Plated, #4-40 UNC.
- * Applicable Wire Range: 22AWG-26AWG.
適用電線範圍: 22AWG-26AWG

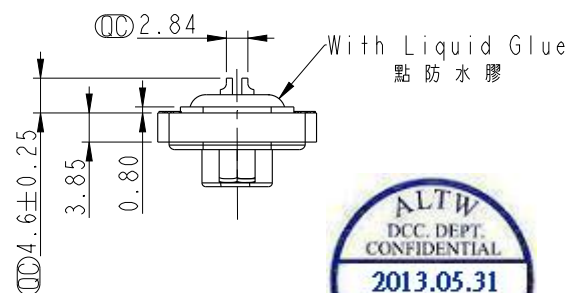

Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚為 1.2mm 以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

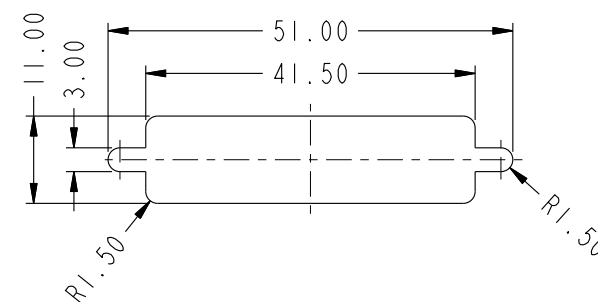

Recommended Panel Cut-Out
建議挖孔尺寸

UNIT:mm				TITLE D-SUB Conn. Panel Screw DB25P M Conn. M Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY		DATE		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°									SDB-25PMMS-SL8001		Yulong_wang		2013-05-31		
				DWG NO		CHECKED BY			DATE						
				SDB-25PMMS-SL8001		Victor			2013-05-31						
				SCALE 1:1		SIZE A4		SHEET 1 OF 1		CUSTOMER		APPROVED BY		DATE	
				REV. C		WC-REV. A.5		QC: Inspection item		ALTW		Maslow		2013-05-31	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SDB-25PMMS-SL8001](#)