





LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	G	REVISED PER ECR-21-100678			08APR2021	SS	VS	

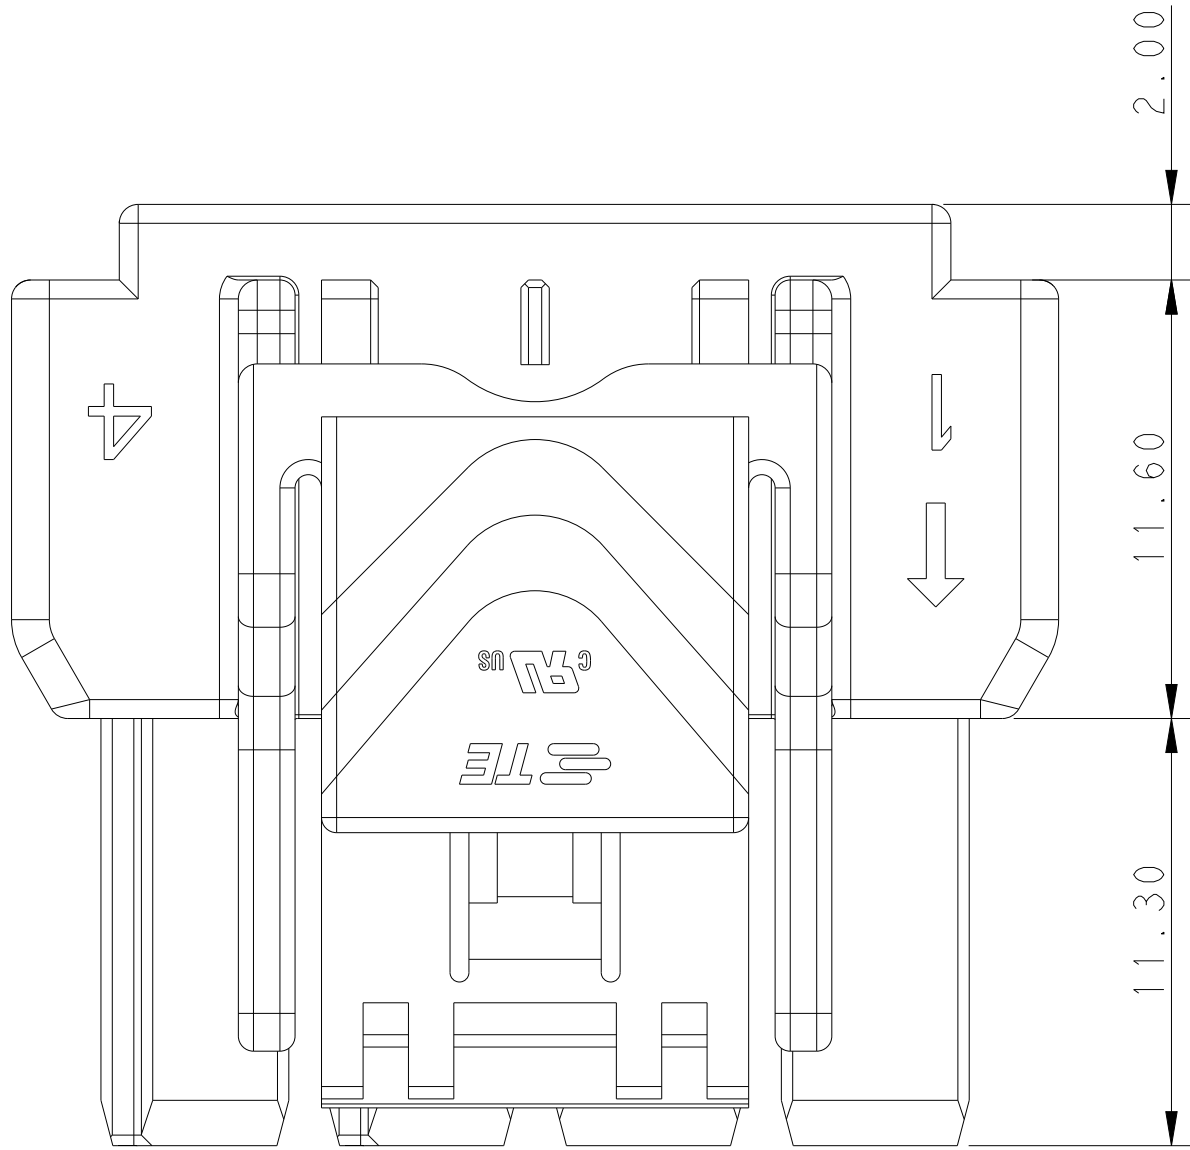



POS.	DIM.A	DIM.B
1*5	33.7	28.0
1*4	27.7	22.0
1*3	21.7	16.0
1*2	15.7	10.0

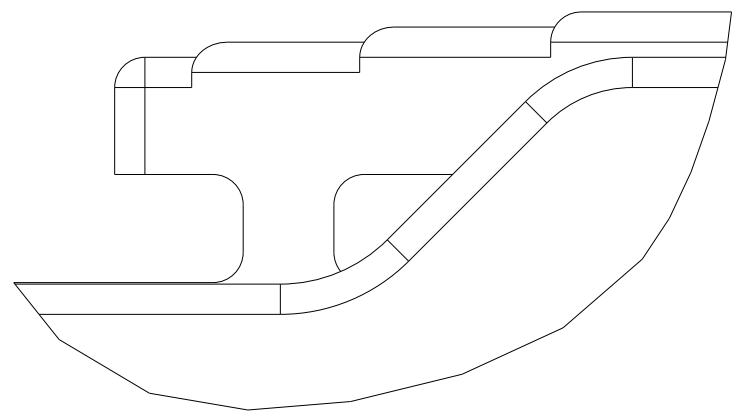

LEVEL 2 LATCH DESIGN

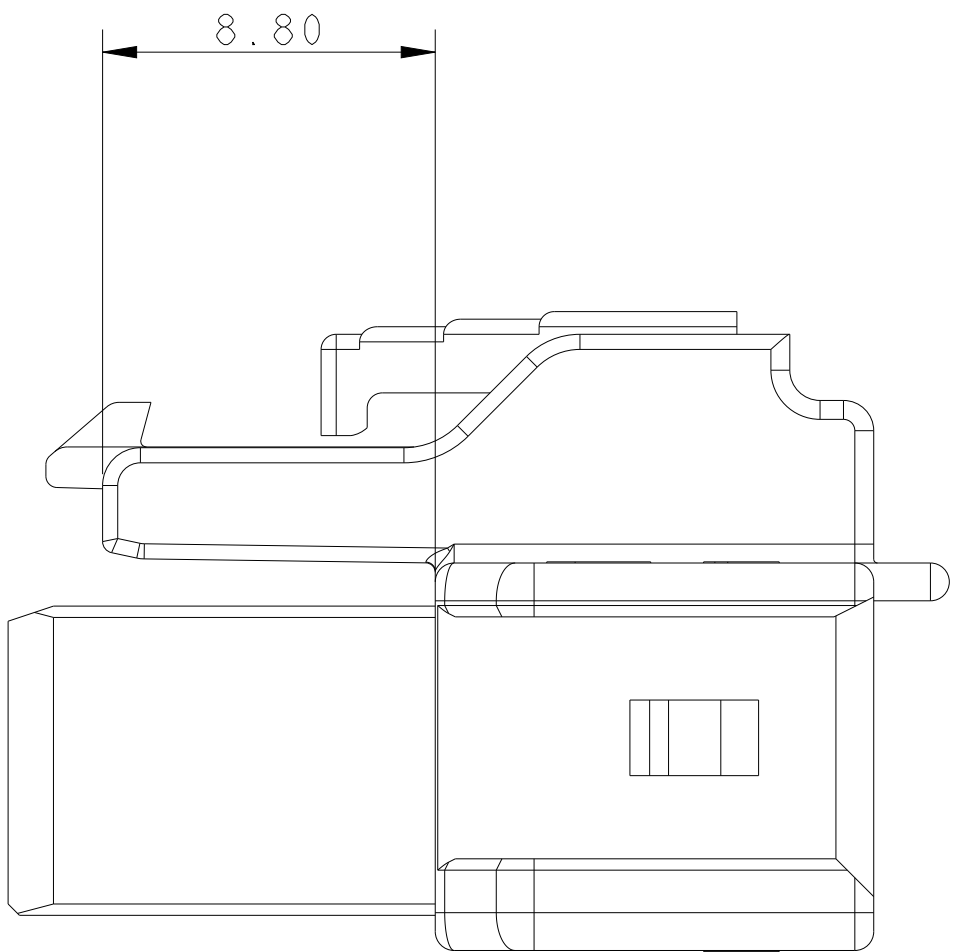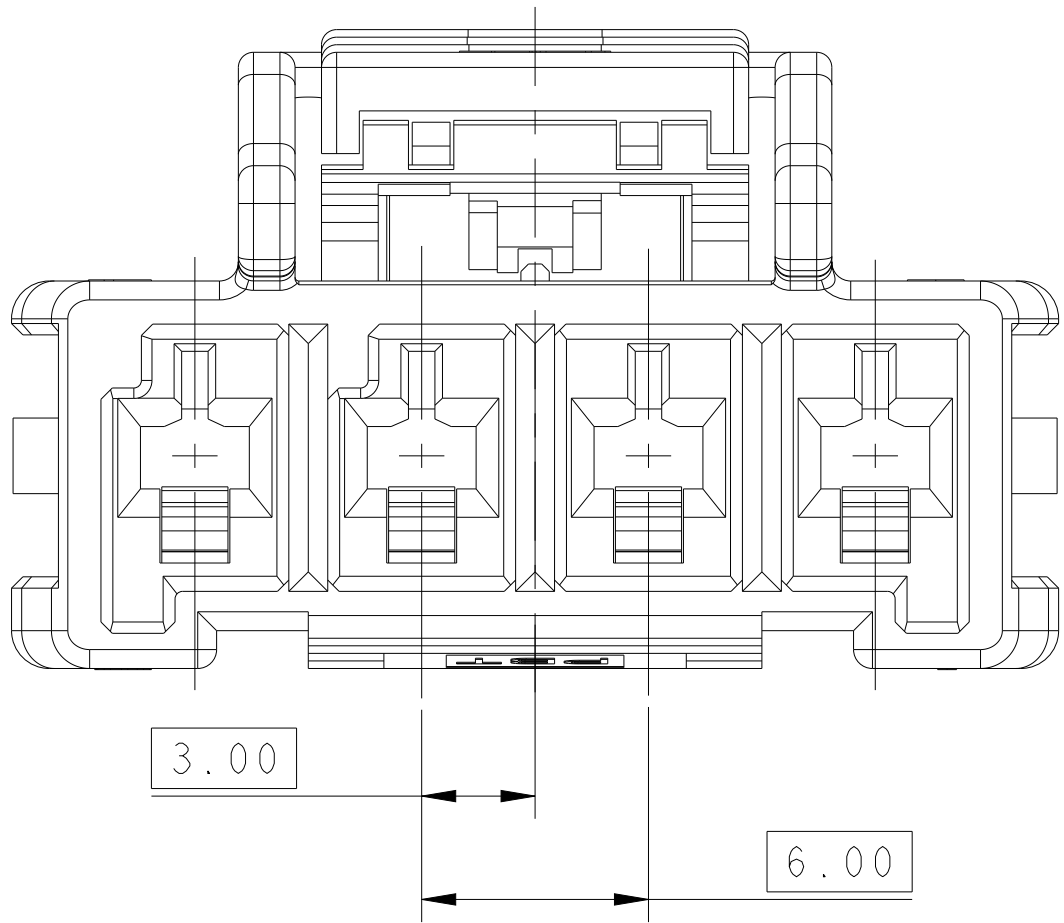

LEVEL 1 LATCH DESIGN

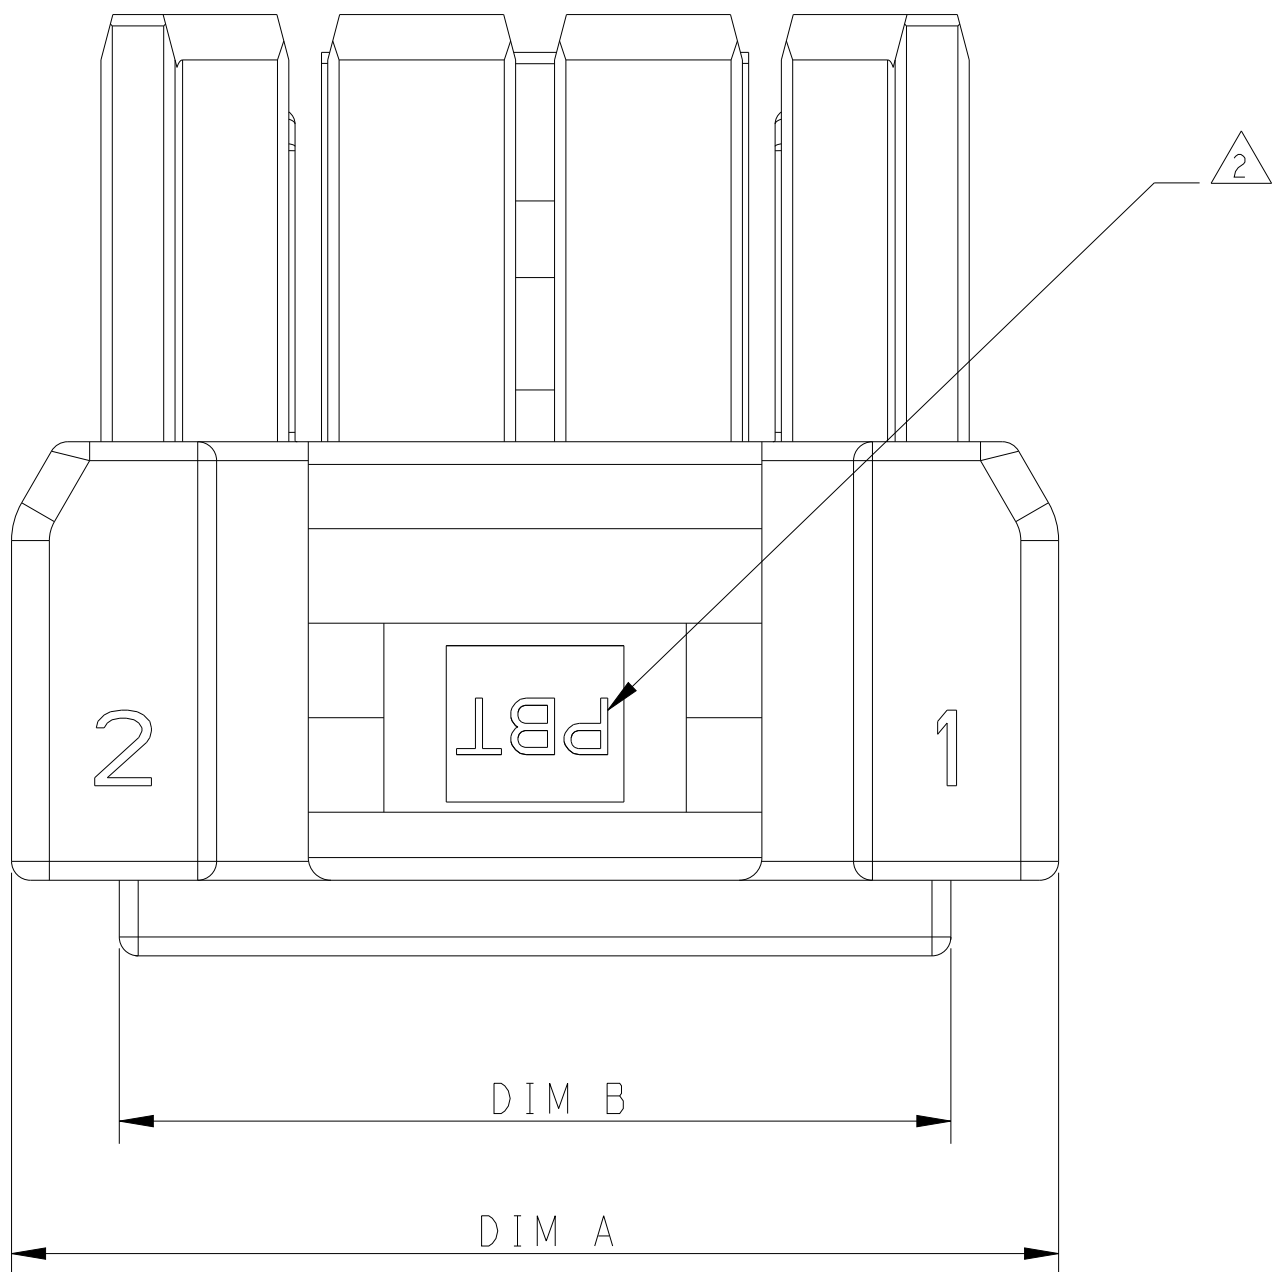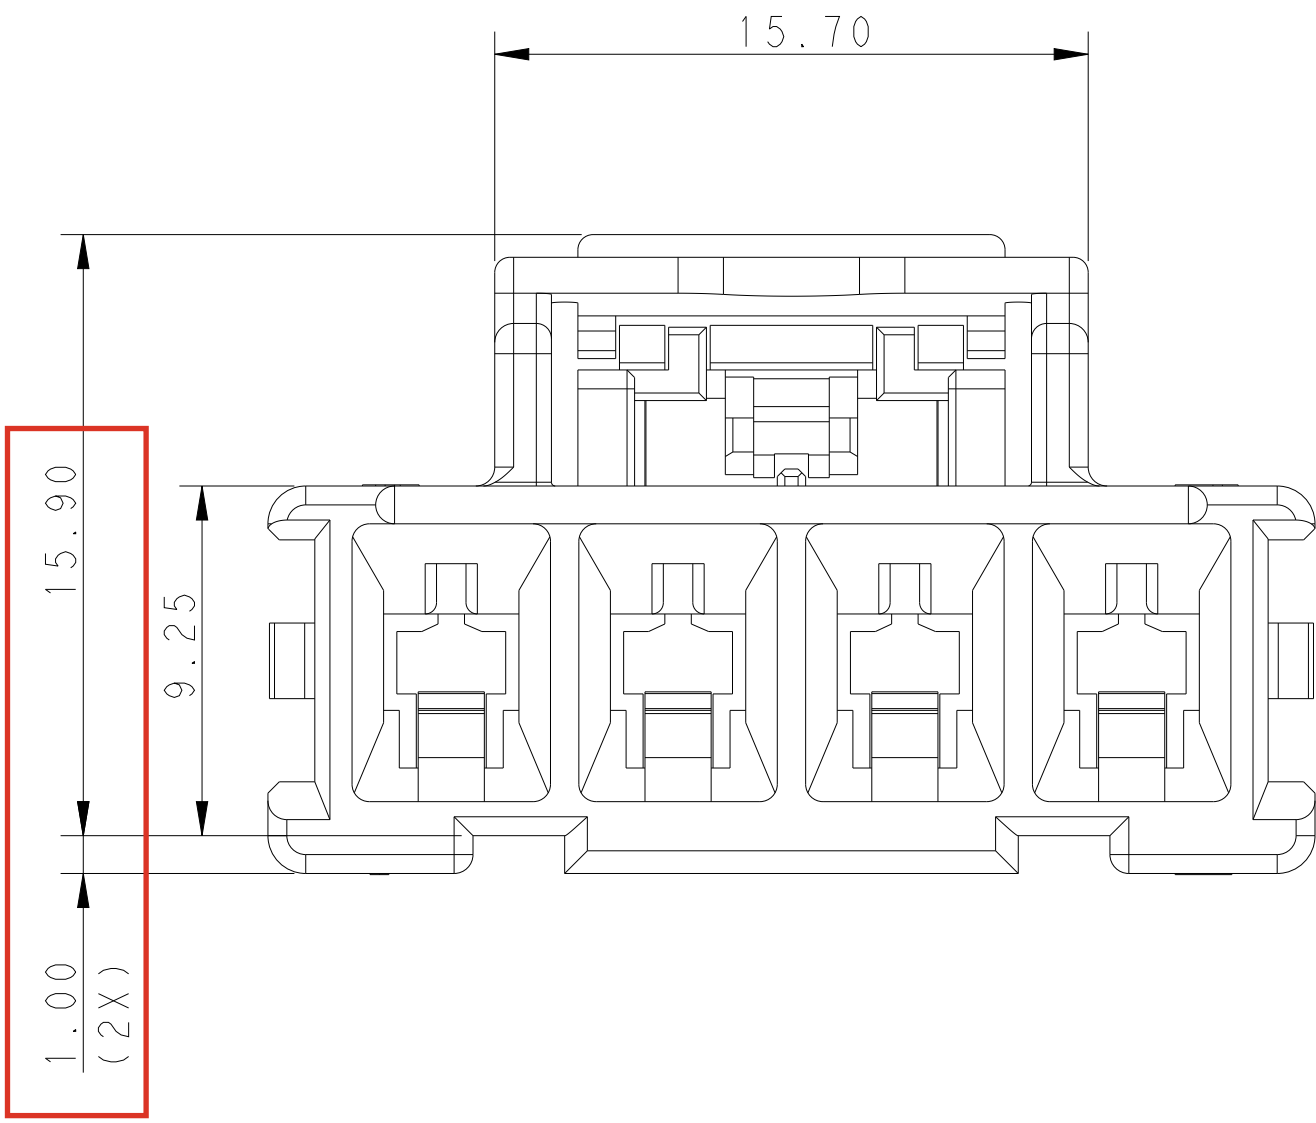

- 1

MATERIAL:
LEVEL 1: PBT GLASS FILLED,STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW
LEVEL 2: NYLON (PA 66),HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D:NATURAL
- 2

MATERIAL MARK:
LEVEL 1: PBT,LEVEL 2:HDT
- 3

APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-* , 2238066-*
- 4









MATING CONN, P/N
CAP HSG: *-1971772-* AND HEADERS: *-1969688-*, *-1969694-
TPA (LOCKING PLATE): *-1971777-*
- 5

FLAMMABILITY RATED UL94 V-0
- 6

GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1
THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST
AND A RESIN GWIT >=775°C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY_WU 09JUL2012	 TE Connectivity		
DIMENSIONS:		CHK HAPYE_WU 09JUL2012			
mm		APVD YUHONG_MAO 09JUL2012	NAME		
		PRODUCT SPEC	PLUG HOUSING,SINGLE ROW POWER TRIPLE LOCK		
		108-106118	SIZE		
		APPLICATION SPEC	CAGE CODE		
MATERIAL		114-106118	DRAWING NO		
		WEIGHT	A100779C=1971773		
Customer Drawing		SCALE	5:1	SHEET 1 OF 2	REV G

REVISIONS				DATE	DWN	APVD
LOC	DIST	P	LTR			
-	-	-	SEE SHEET 1	-	-	-

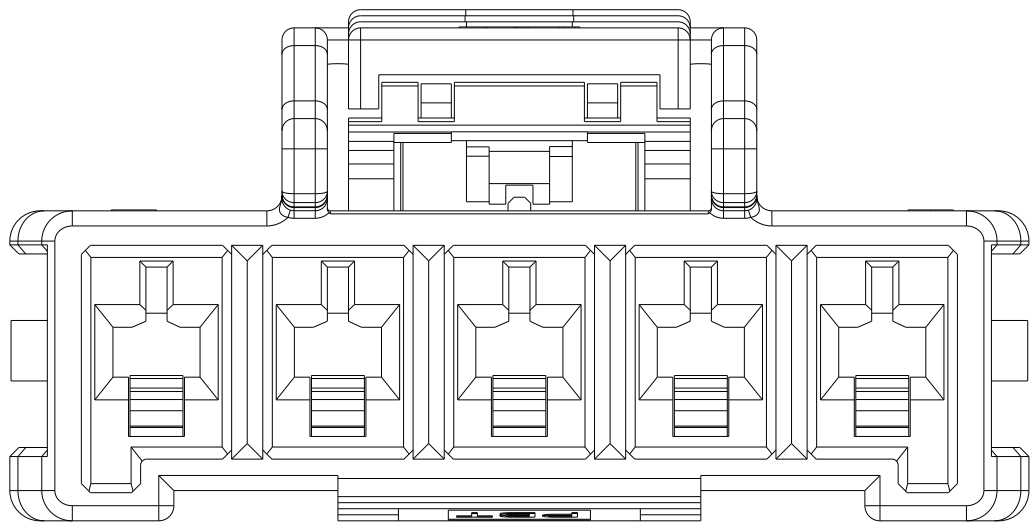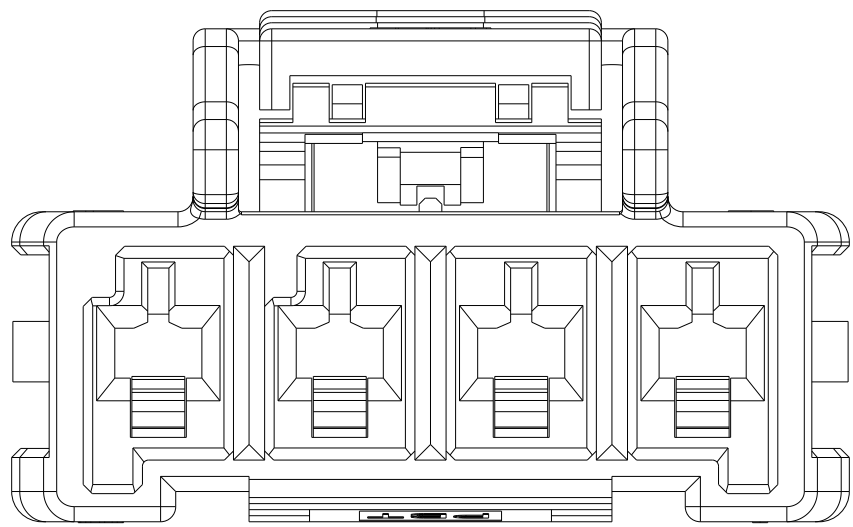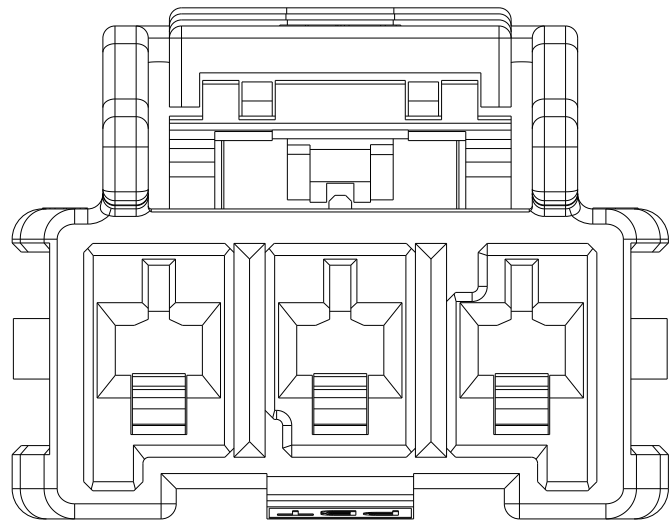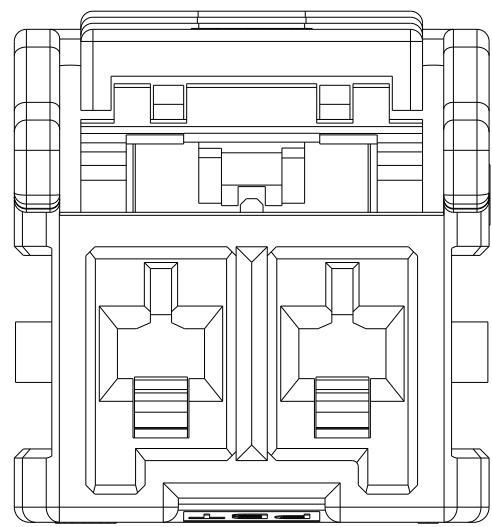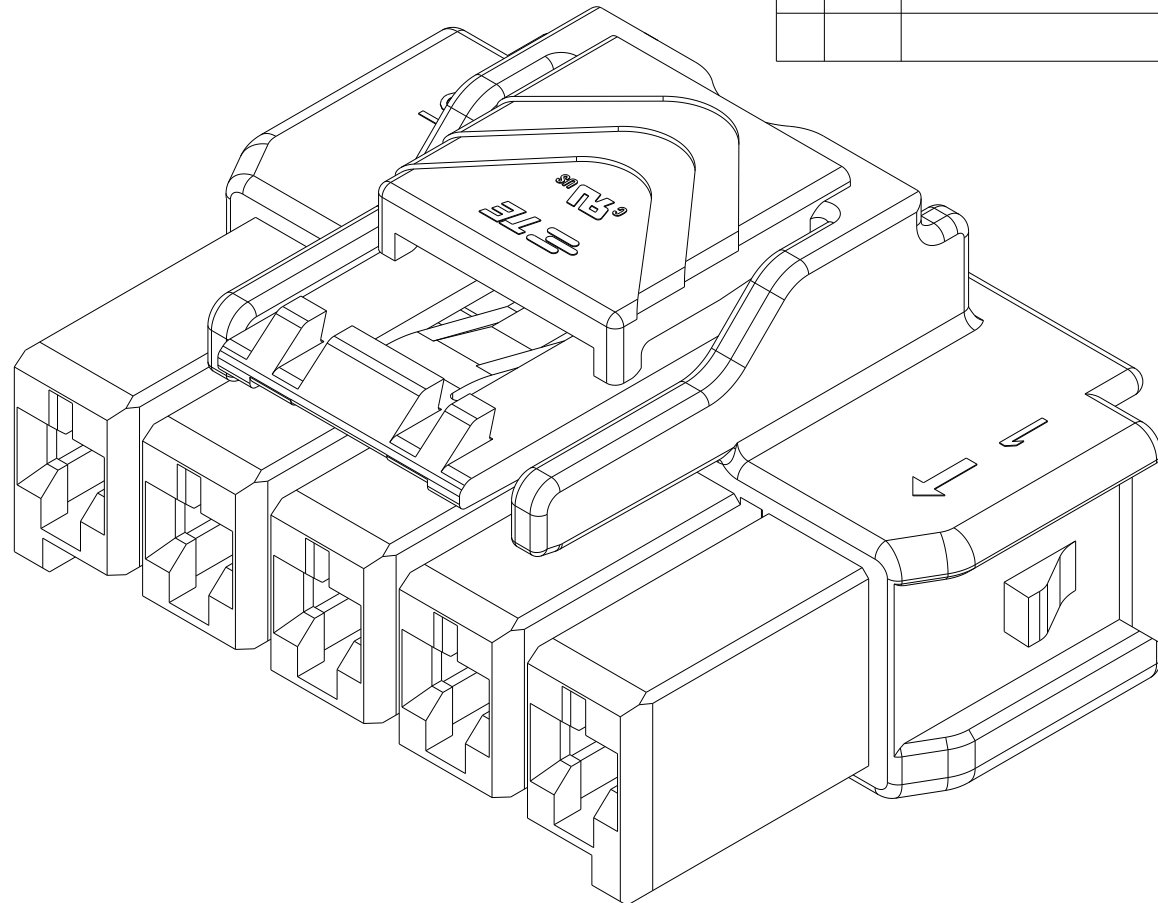
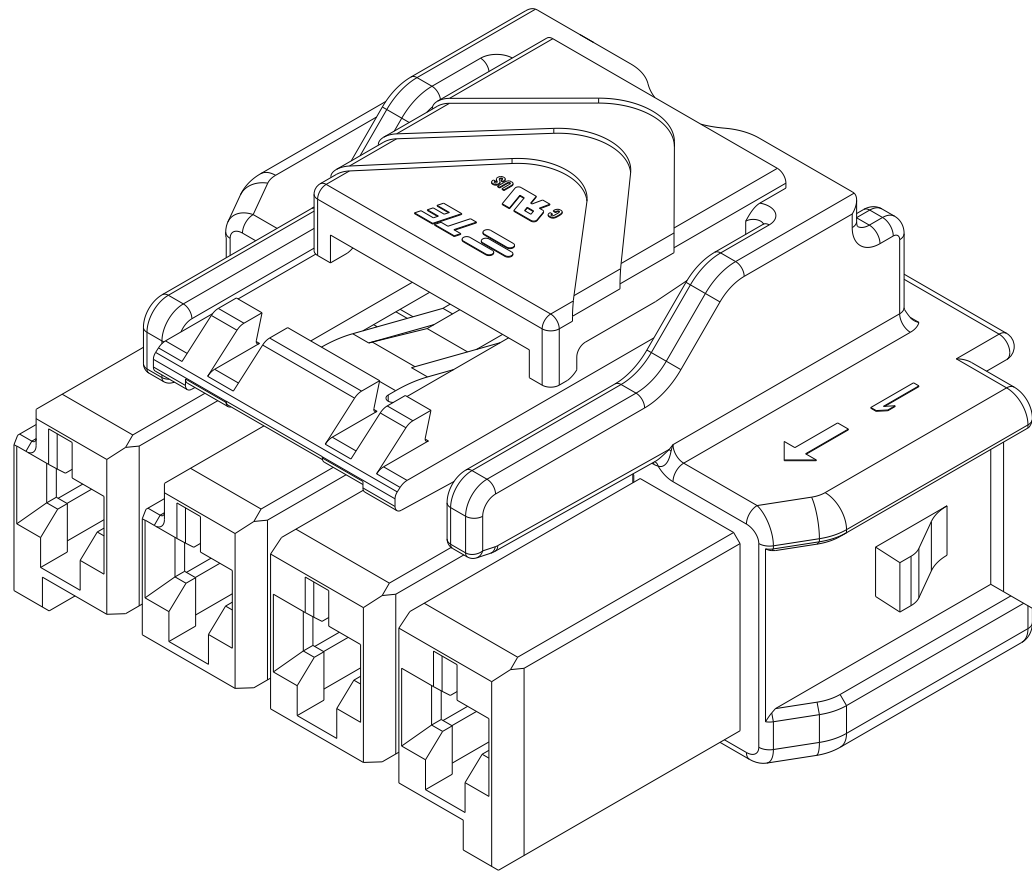
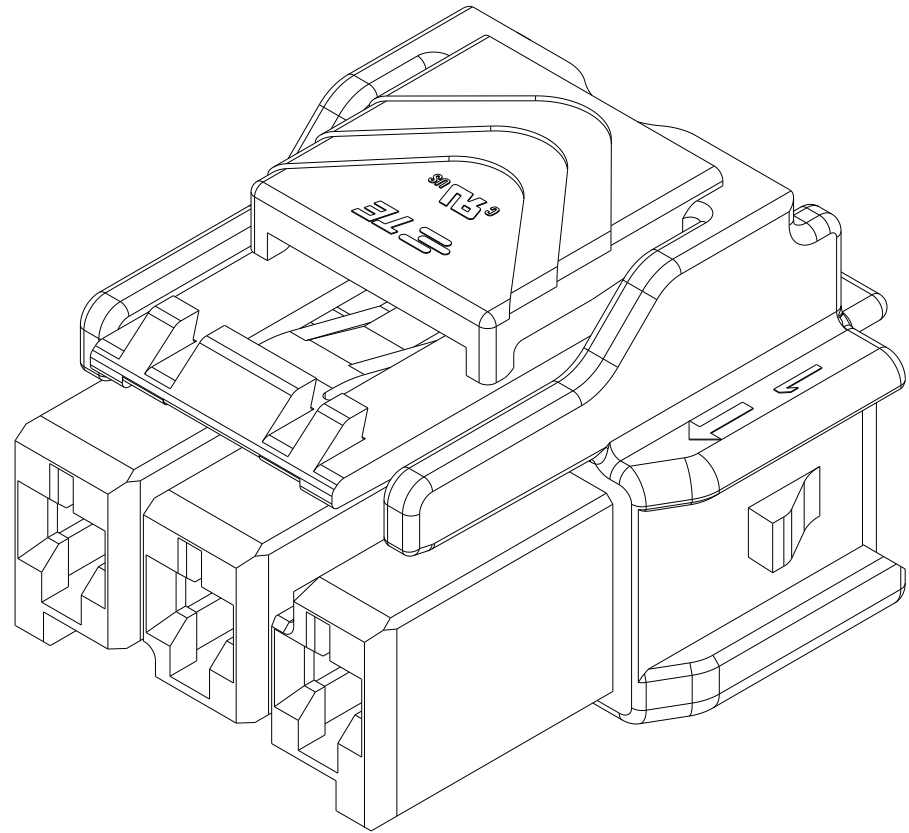
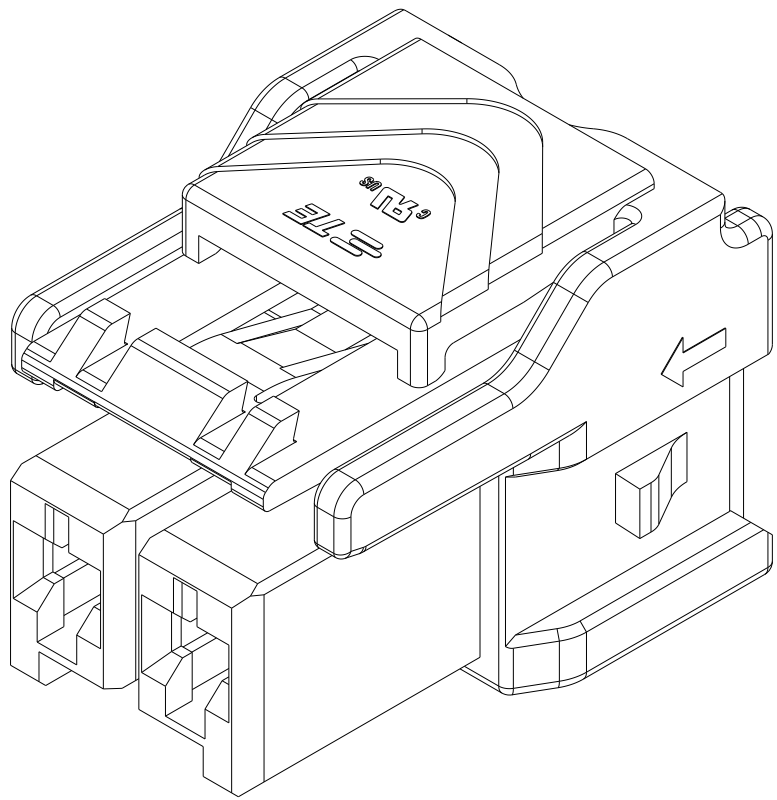


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

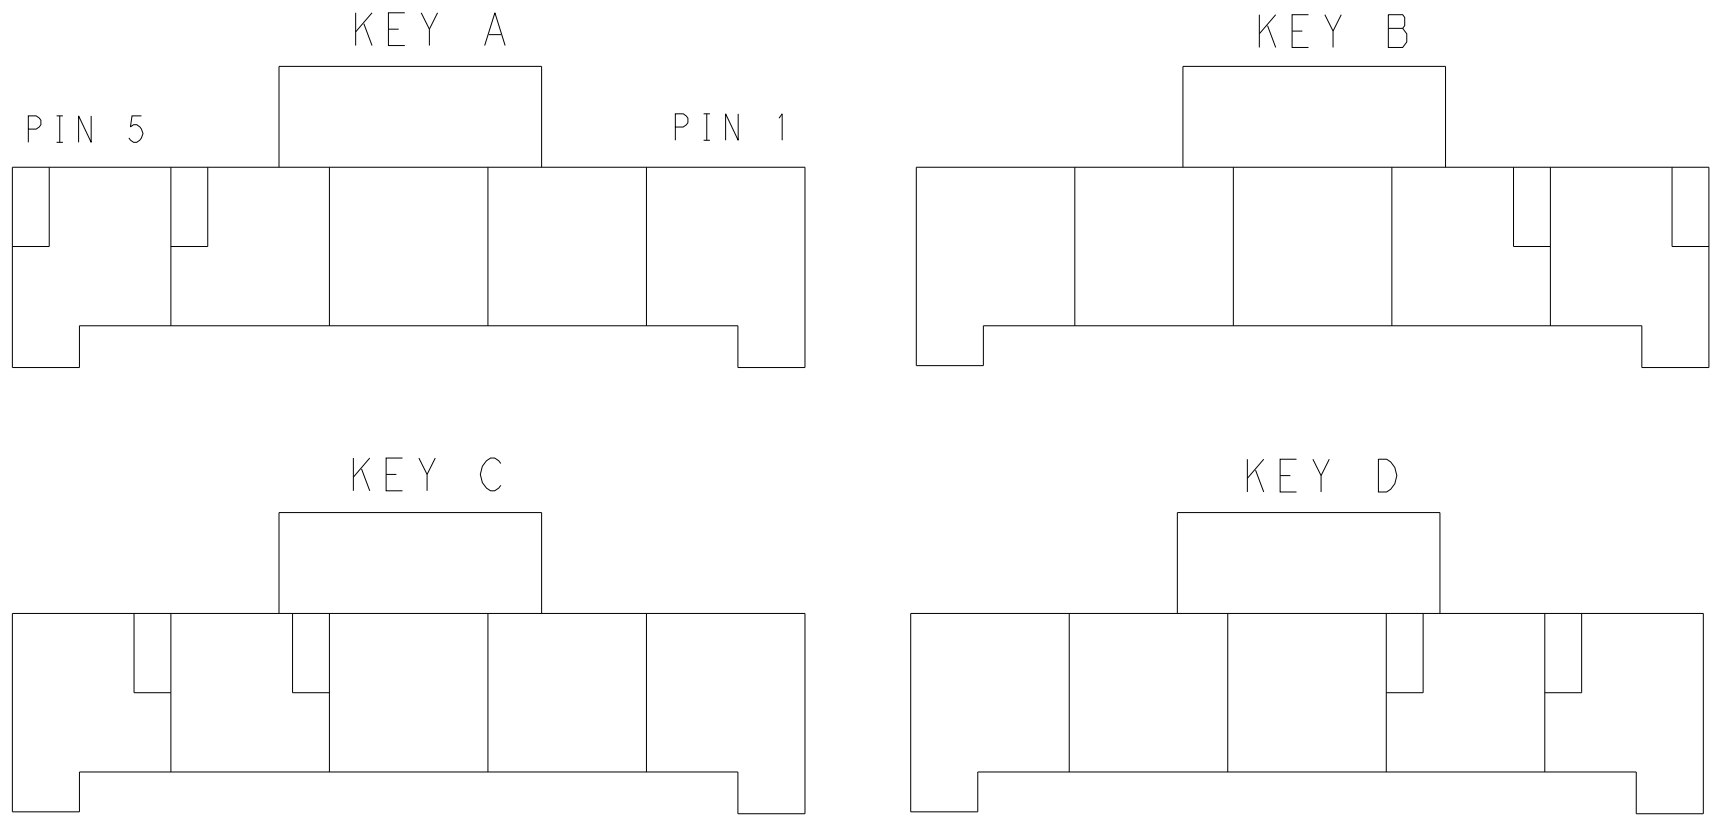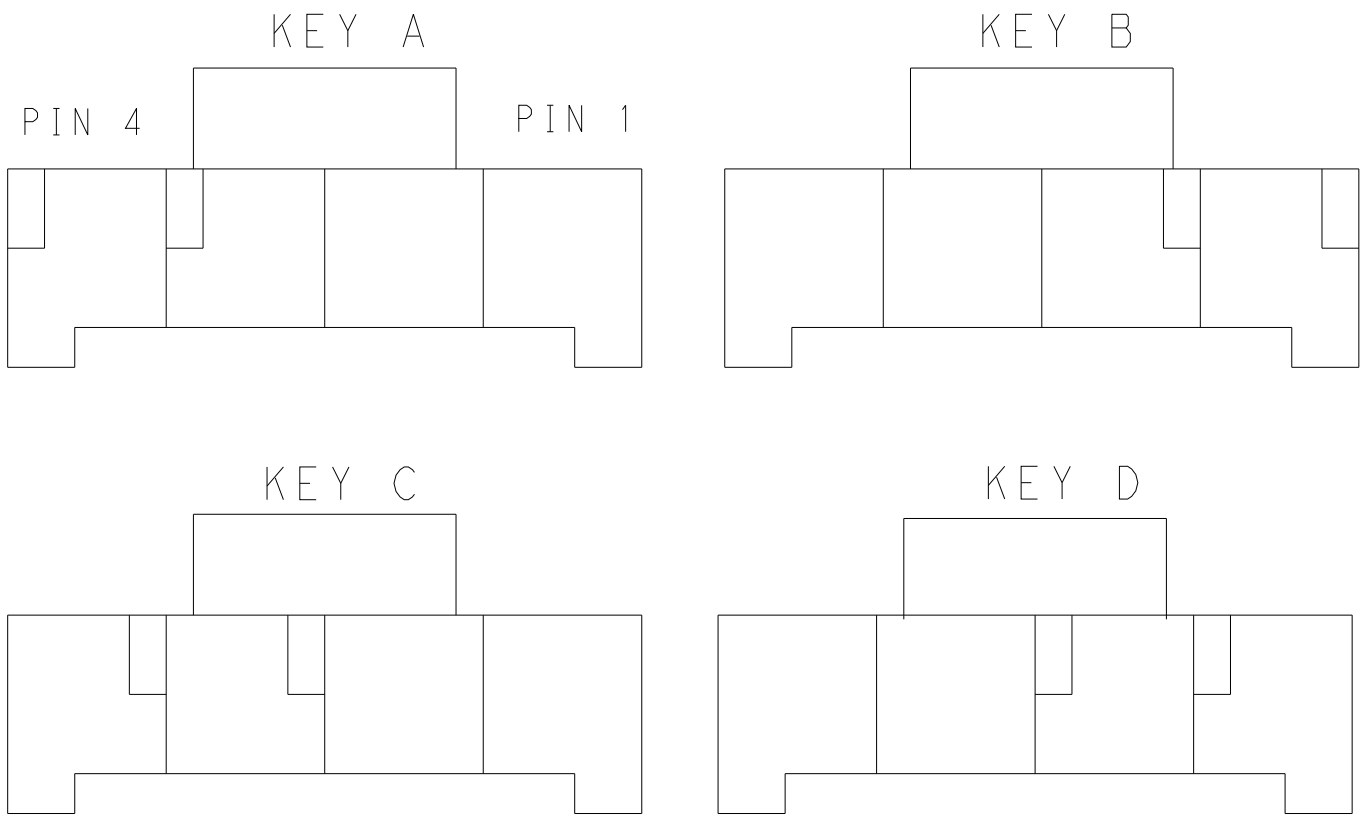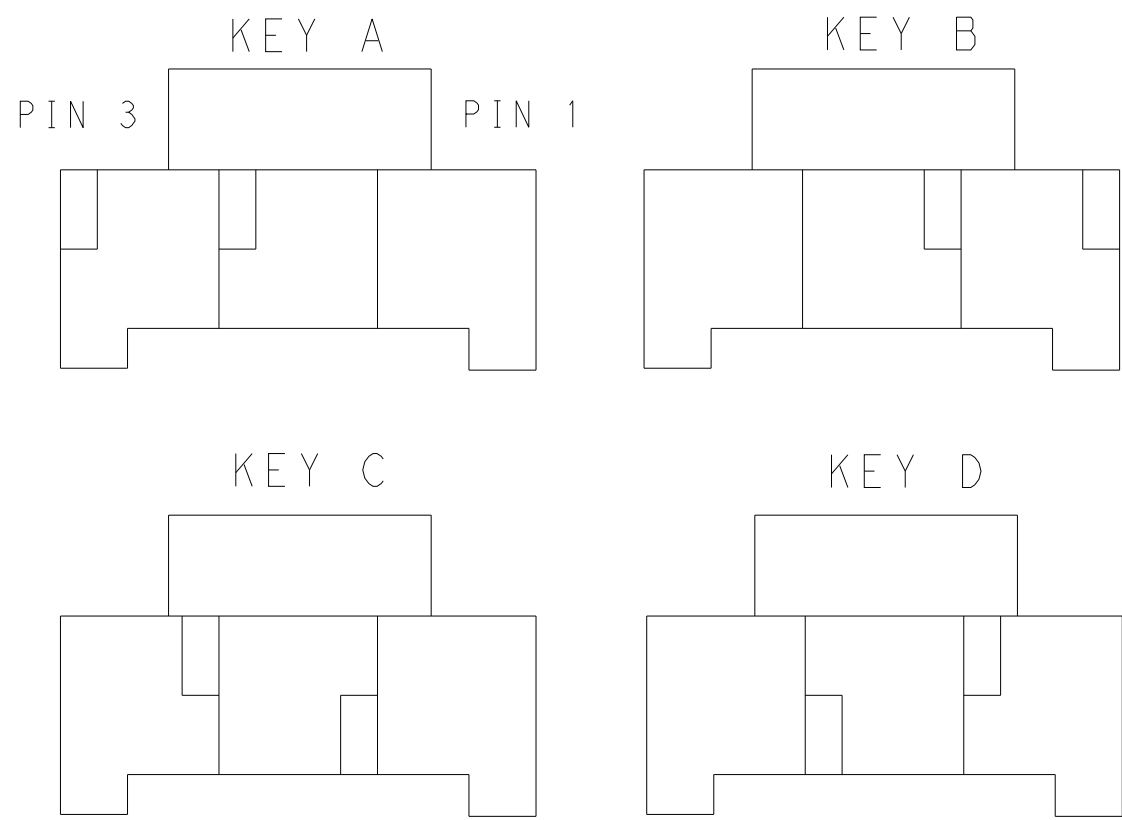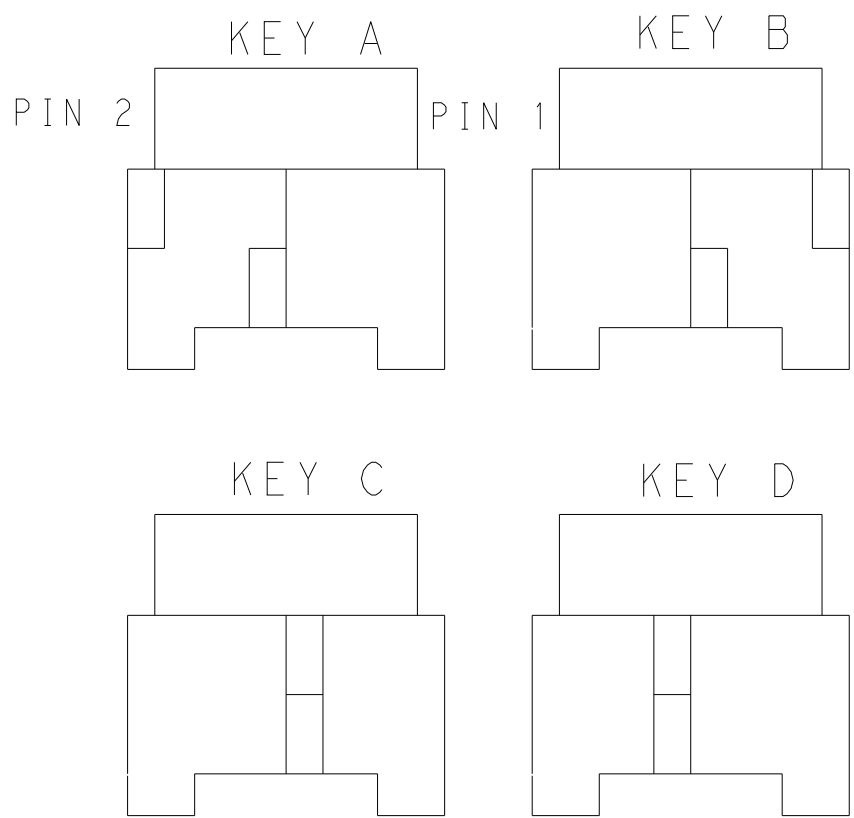

KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*3	LEVEL 1	KEY A	1-1971773-3
		KEY B	2-1971773-3
		KEY C	3-1971773-3
		KEY D	4-1971773-3
	LEVEL 2	KEY A	5-1971773-3
		KEY B	6-1971773-3
		KEY C	7-1971773-3
		KEY D	8-1971773-3
1*2	LEVEL 1	KEY A	1-1971773-2
		KEY B	2-1971773-2
		KEY C	3-1971773-2
		KEY D	4-1971773-2
	LEVEL 2	KEY A	9-1971773-2
		KEY B	6-1971773-2
		KEY C	7-1971773-2
		KEY D	8-1971773-2
POS.	MATERIAL	KEY	P/N

1*5	LEVEL 1	KEY A	1-1971773-7
		KEY B	2-1971773-7
		KEY C	3-1971773-7
		KEY D	4-1971773-7
	LEVEL 2	KEY A	5-1971773-7
		KEY B	6-1971773-7
		KEY C	7-1971773-7
		KEY D	8-1971773-7
1*4	LEVEL 1	KEY A	1-1971773-4
		KEY B	2-1971773-4
		KEY C	3-1971773-4
		KEY D	4-1971773-4
	LEVEL 2	KEY A	5-1971773-4
		KEY B	6-1971773-4
		KEY C	7-1971773-4
		KEY D	8-1971773-4
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU		09JUL2012		TE TE Connectivity	
DIMENSIONS: mm		CHK	HAPYE WU		09JUL2012			
		APVD	YUHONG MAO		09JUL2012			
		NAME						
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH -		PRODUCT SPEC		108-106118		PLUG HOUSING, SINGLE ROW		
		APPLICATION SPEC		114-106118		POWER TRIPLE LOCK		
		WEIGHT		-		-		
MATERIAL		-		-		-		
		Customer Drawing		SCALE 5:1		SHEET 2 OF 2		
				DRAWING NO. A100779C=1971773		REV G		