





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		G	REVISED PER ECR-21-100678	08APR2021	SS	VS

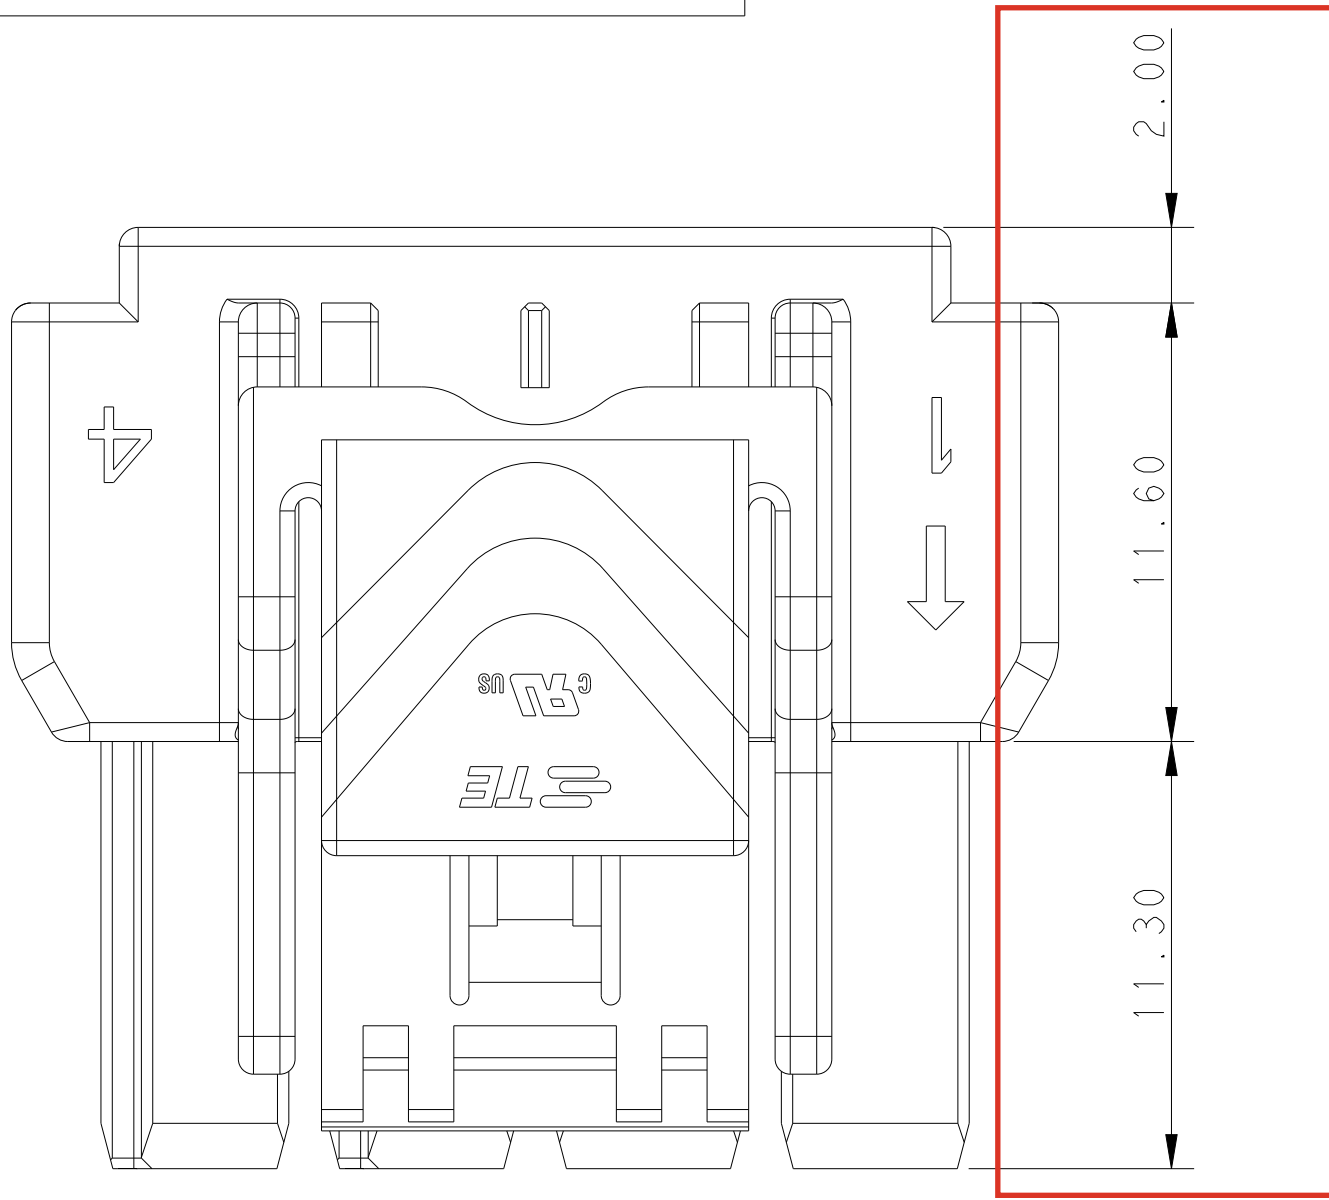



POS.	DIM.A	DIM.B
1*5	33.7	28.0
1*4	27.7	22.0
1*3	21.7	16.0
1*2	15.7	10.0

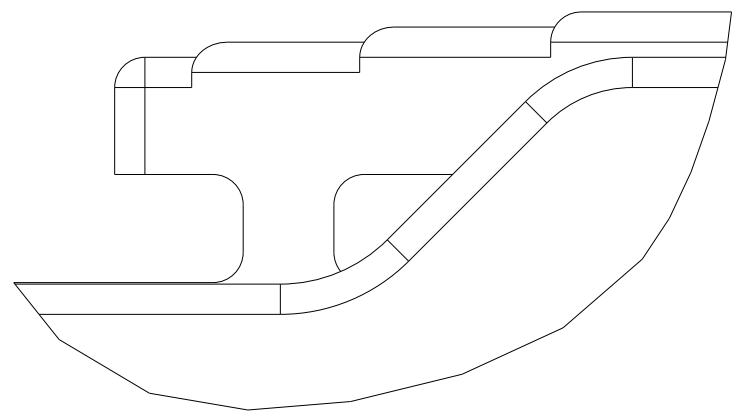

LEVEL 2 LATCH DESIGN

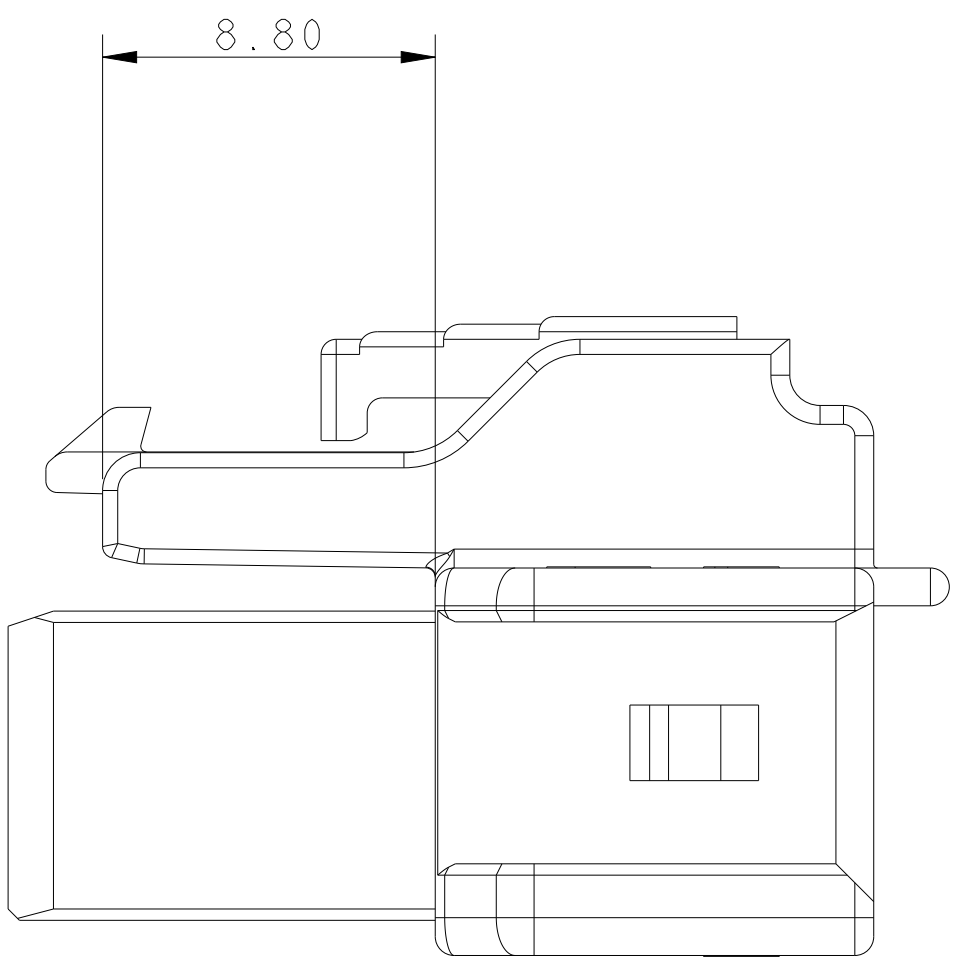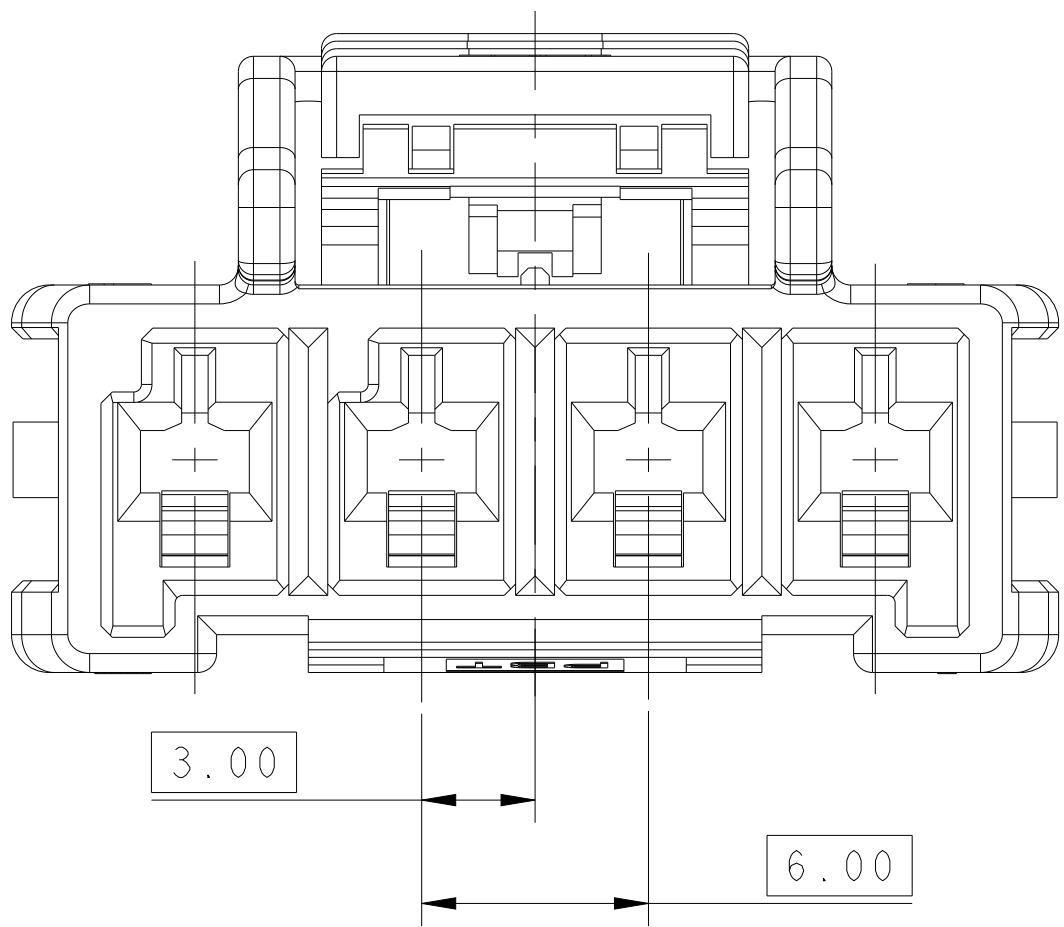









LEVEL 1 LATCH DESIGN

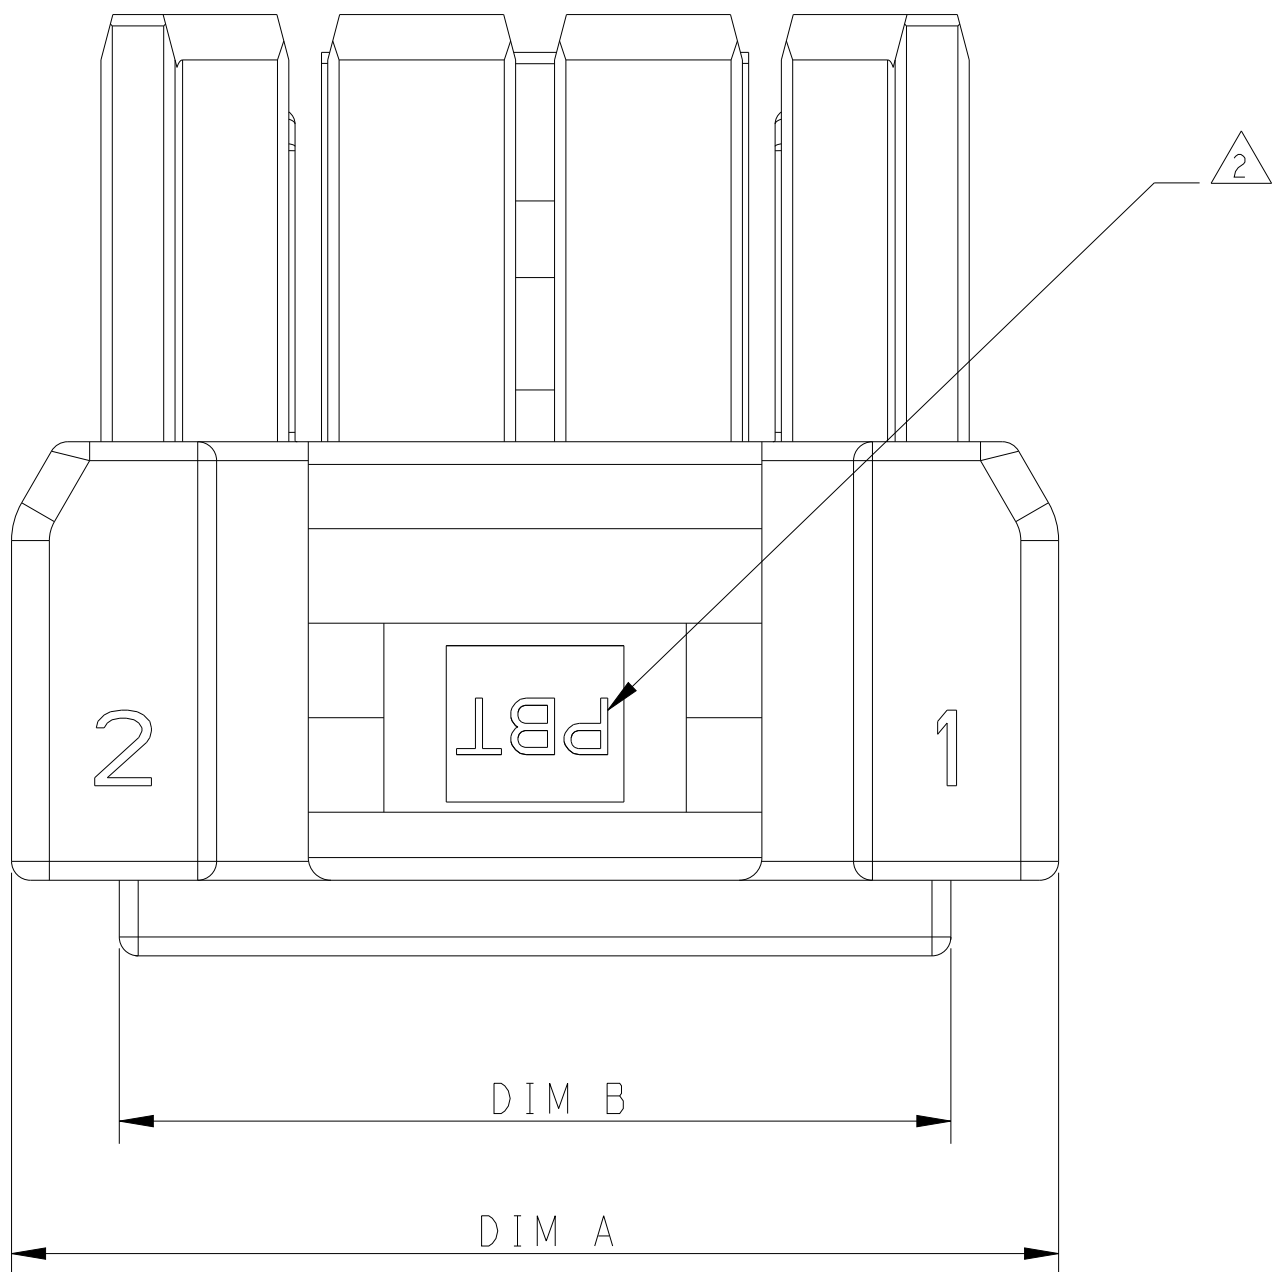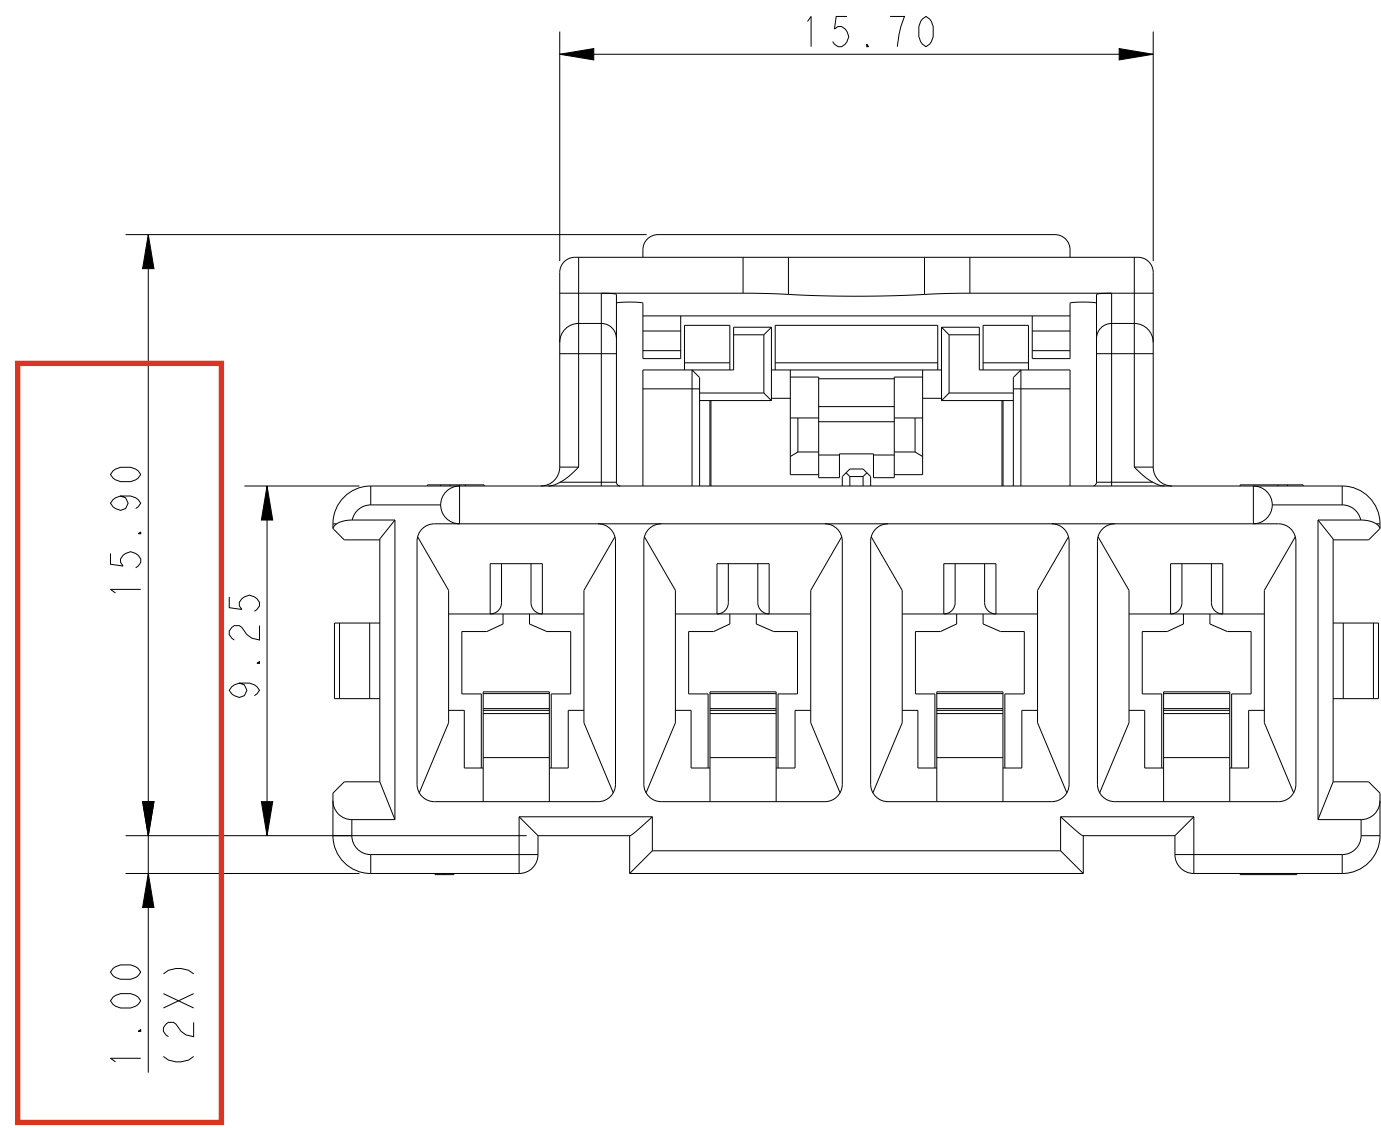

- ⚠ MATERIAL:
LEVEL 1: PBT GLASS FILLED,STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW
- LEVEL 2: NYLON (PA 66),HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D:NATURAL
- ⚠ MATERIAL MARK:
LEVEL 1: PBT,LEVEL 2:HDT
- 3 APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-* , 2238066-*
- 4 MATING CONN, P/N
CAP HSG: *-1971772-* AND HEADERS: *-1969688-*, *-1969694-
TPA (LOCKING PLATE): *-1971777-*
- 5 FLAMMABILITY RATED UL94 V-0
- ⚠ 6 GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1
THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST
AND A RESIN GWIT >=775°C

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	TOMMY_WU		09JUL2012		 TE Connectivity						
				CHK	HAPYE_WU		09JUL2012								
				APVD	YUHONG_MAO		09JUL2012								
				NAME											
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC				PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK -							
mm				APPLICATION SPEC											
		0 PLC ± 1 PLC ±0.35 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		108-106118 114-106118											
MATERIAL		-		WEIGHT -											
		-		A100779C=1971773				RESTRICTED TO -							
Customer Drawing				SCALE		5:1		SHEET		1 OF 2		REV		G	

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	

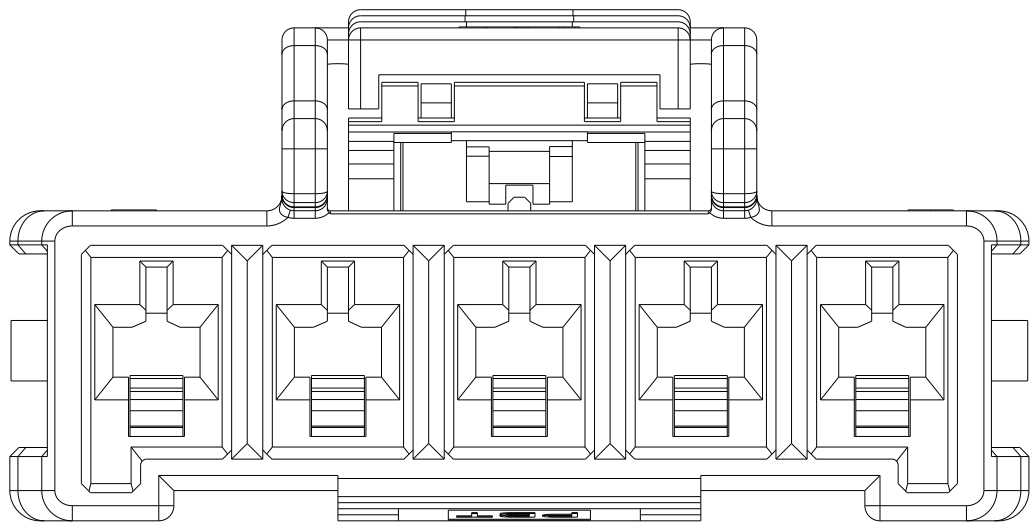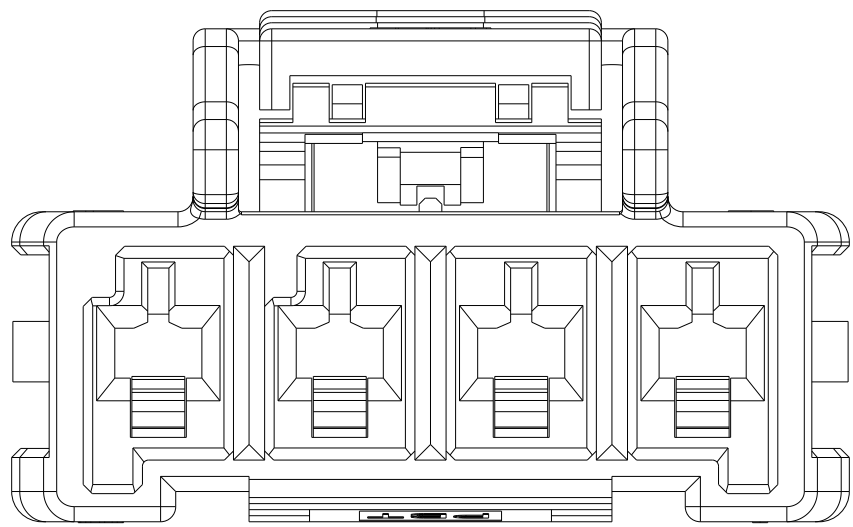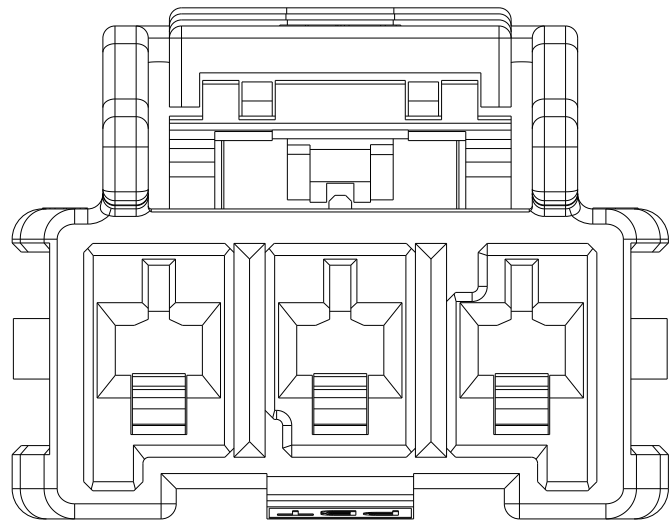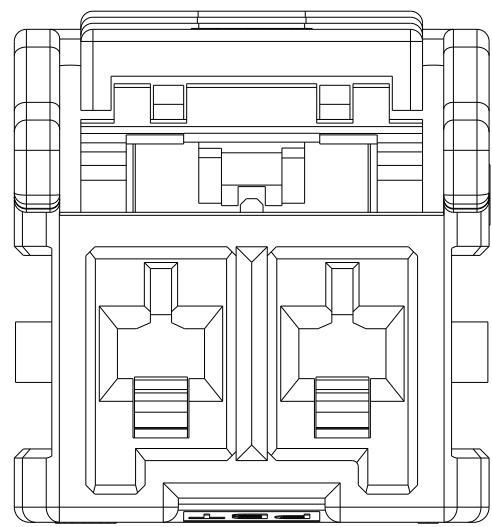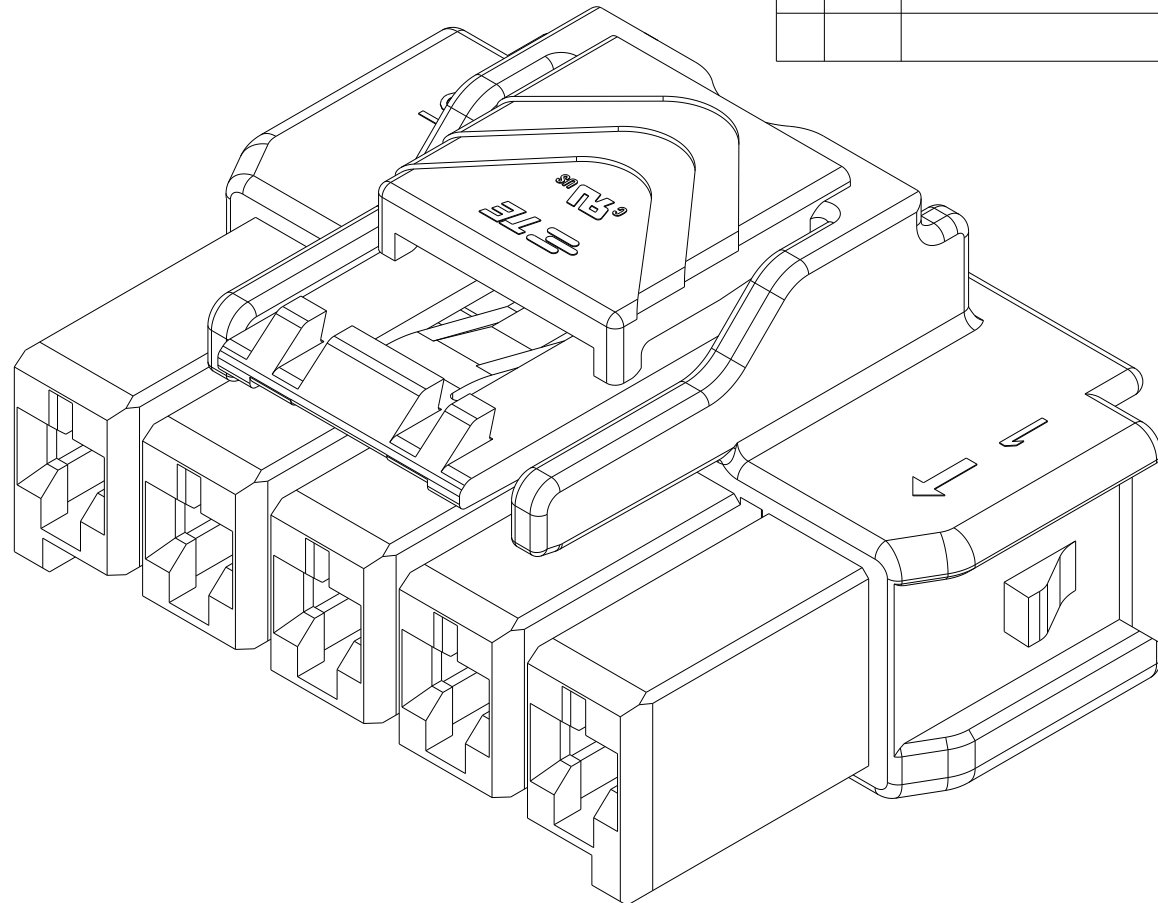
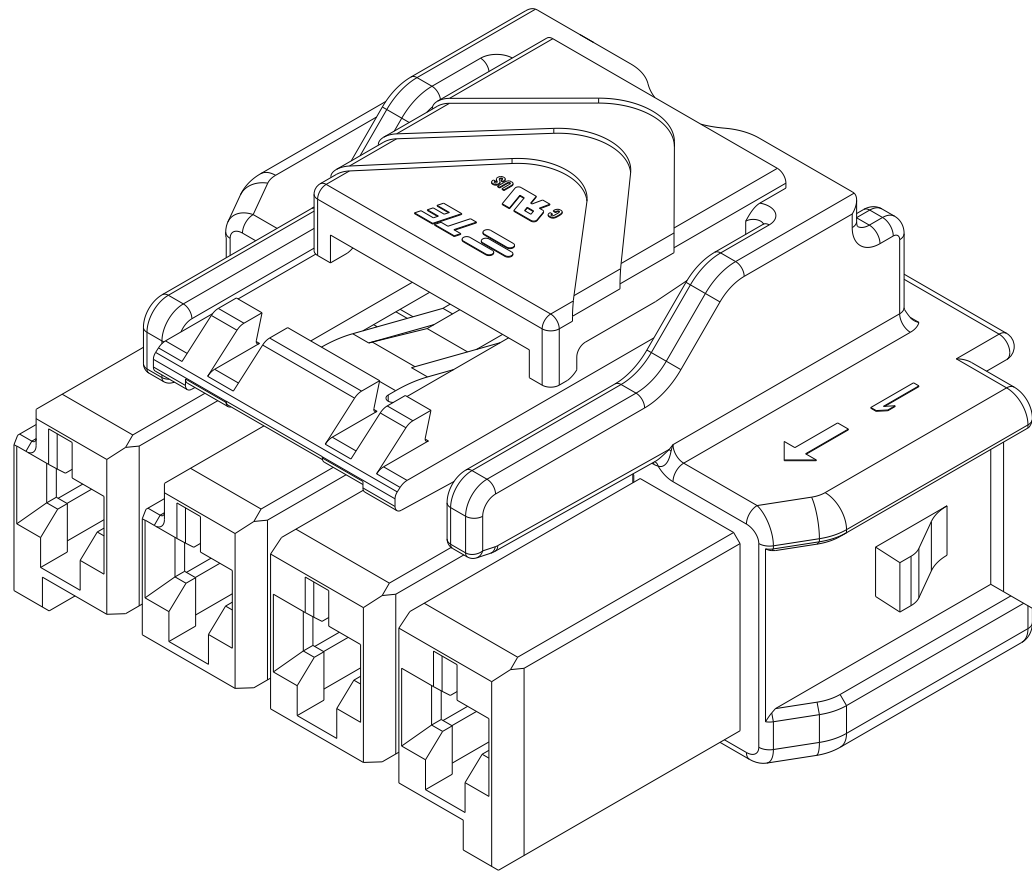
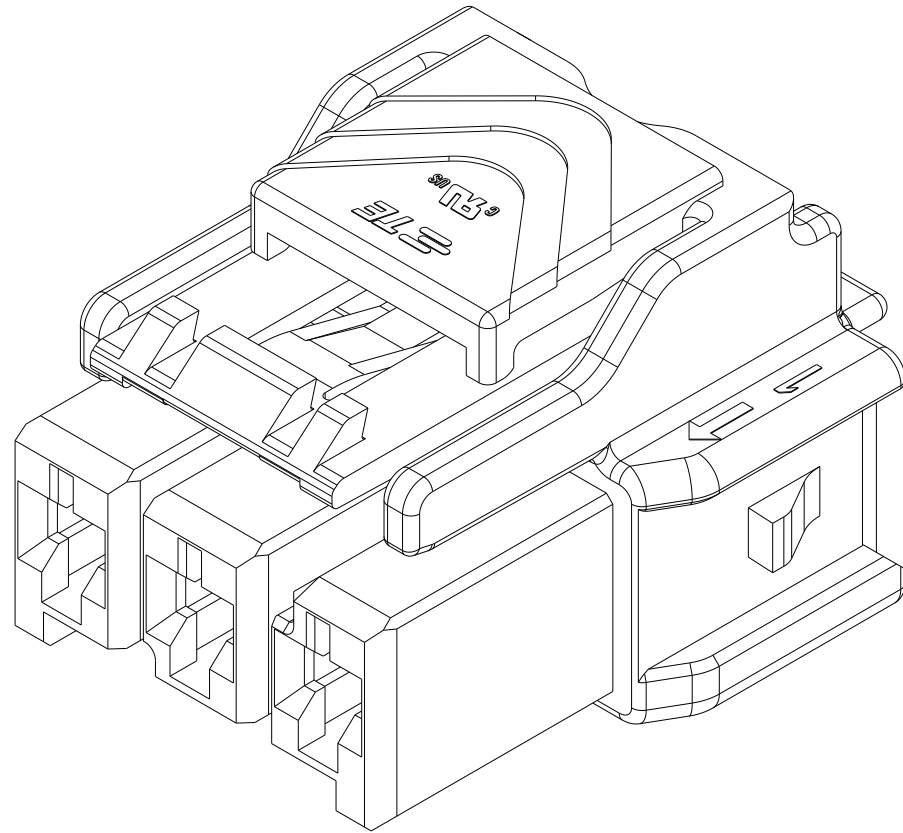
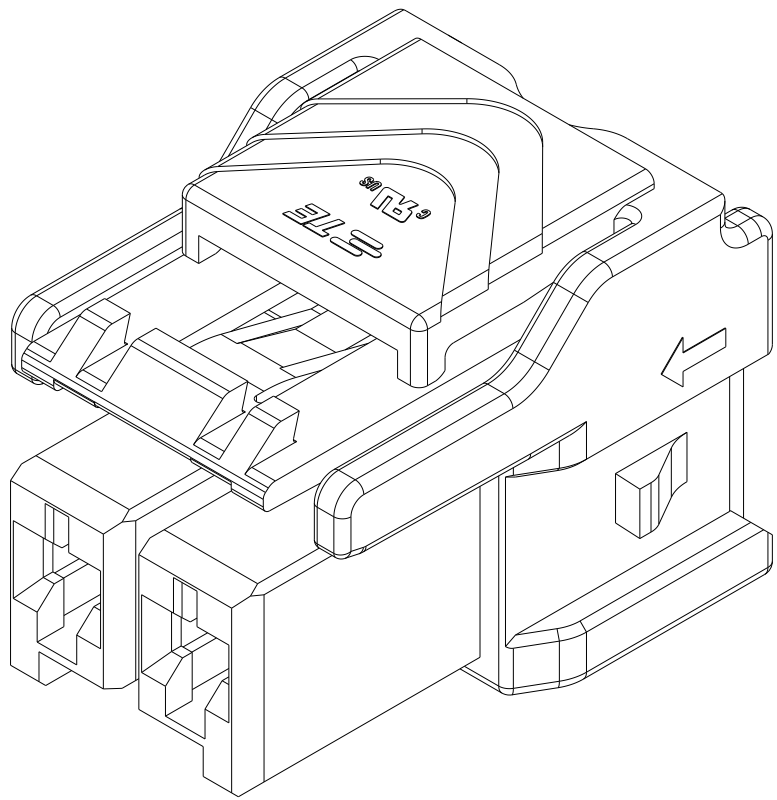


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

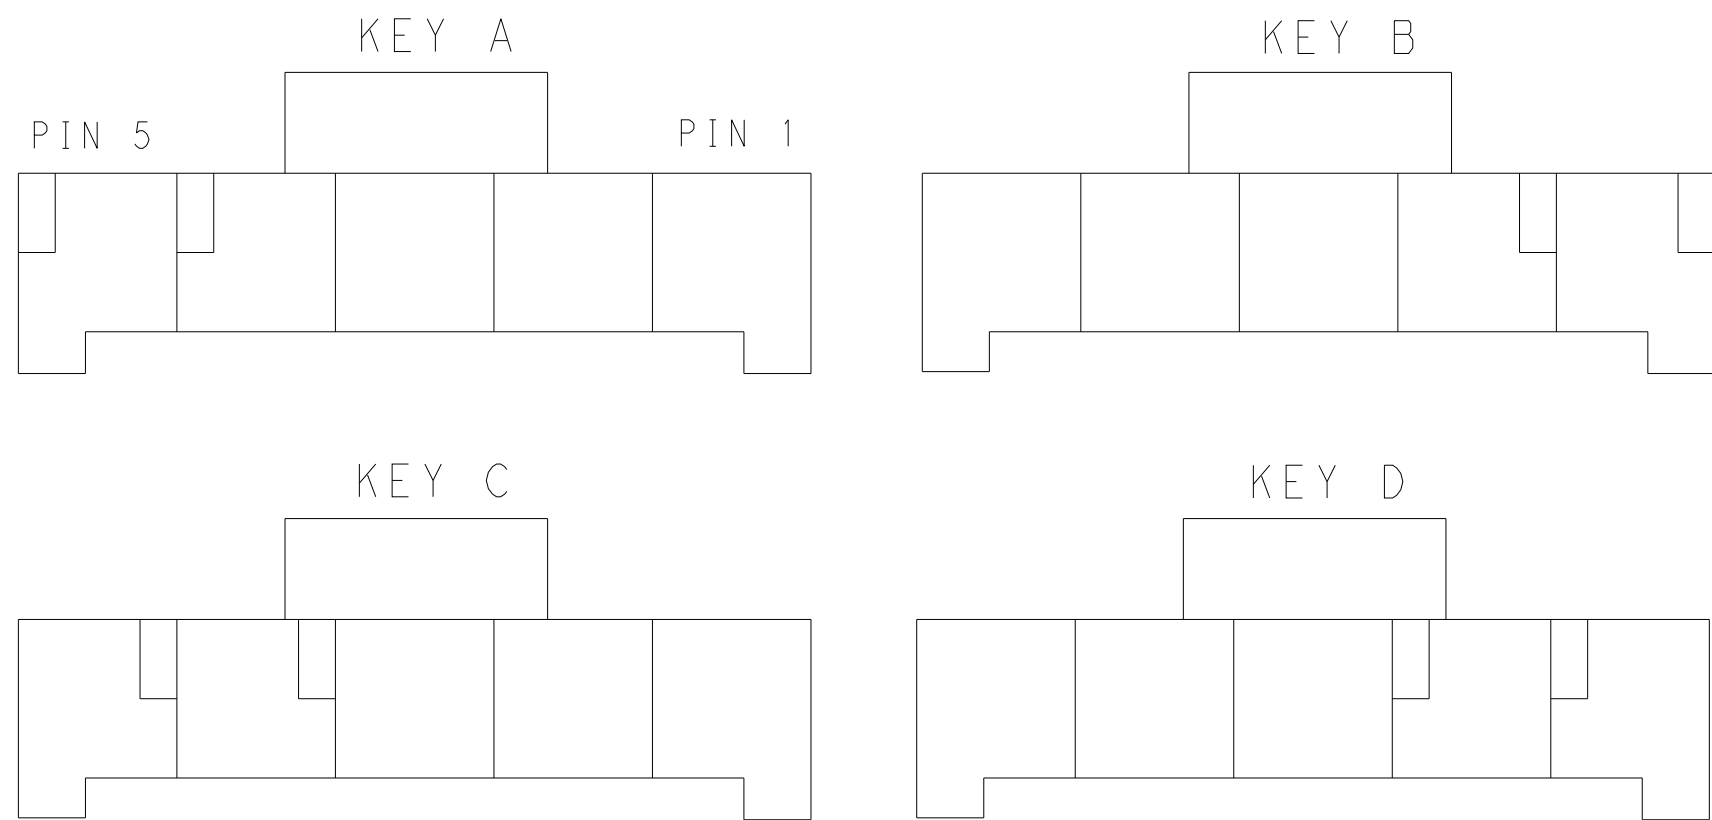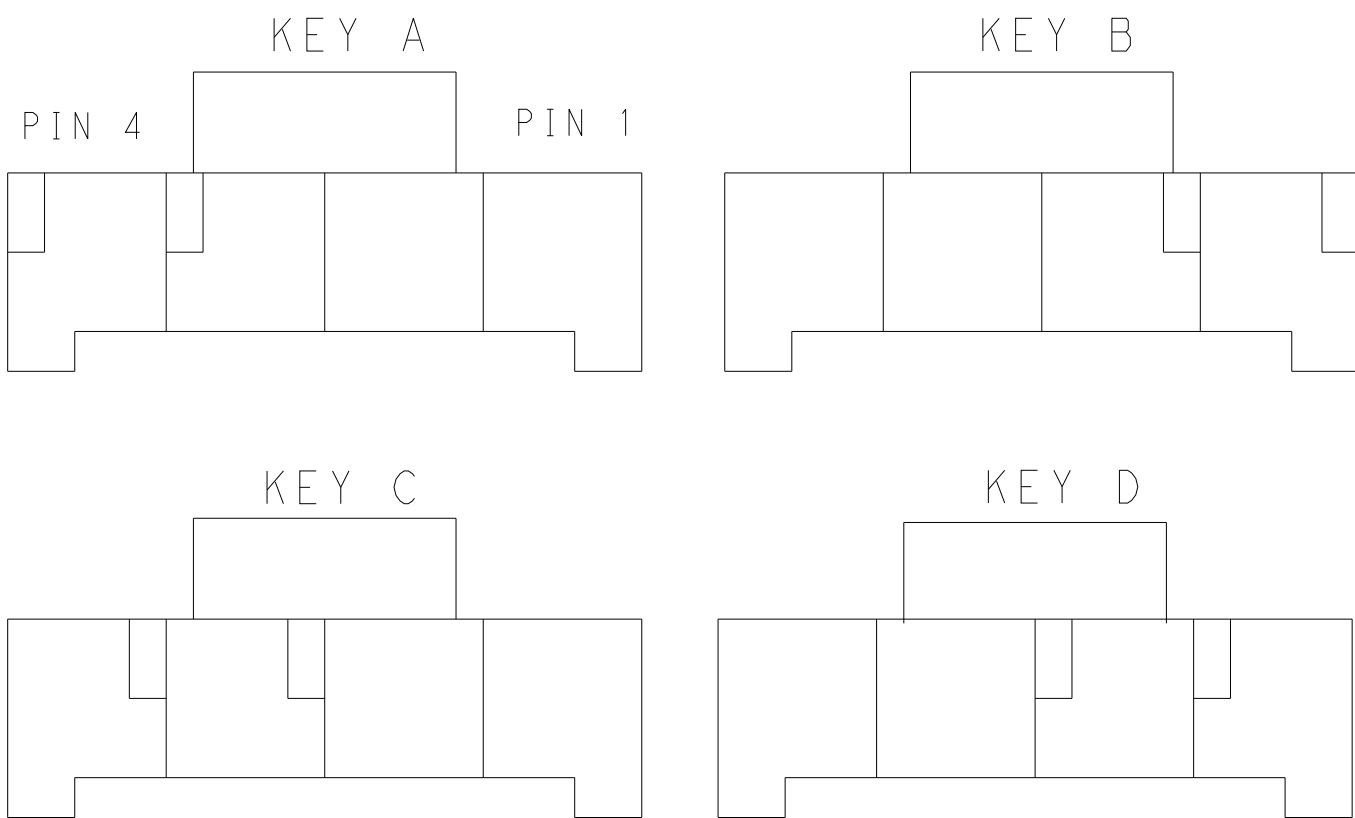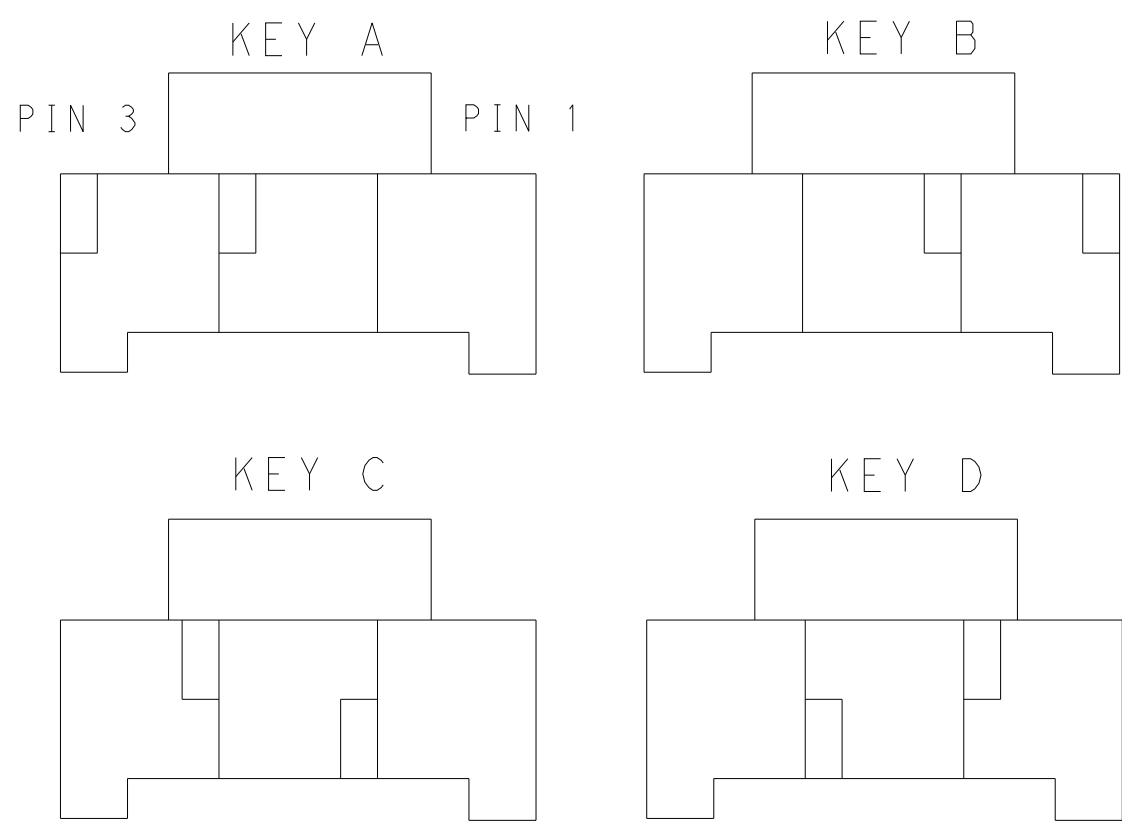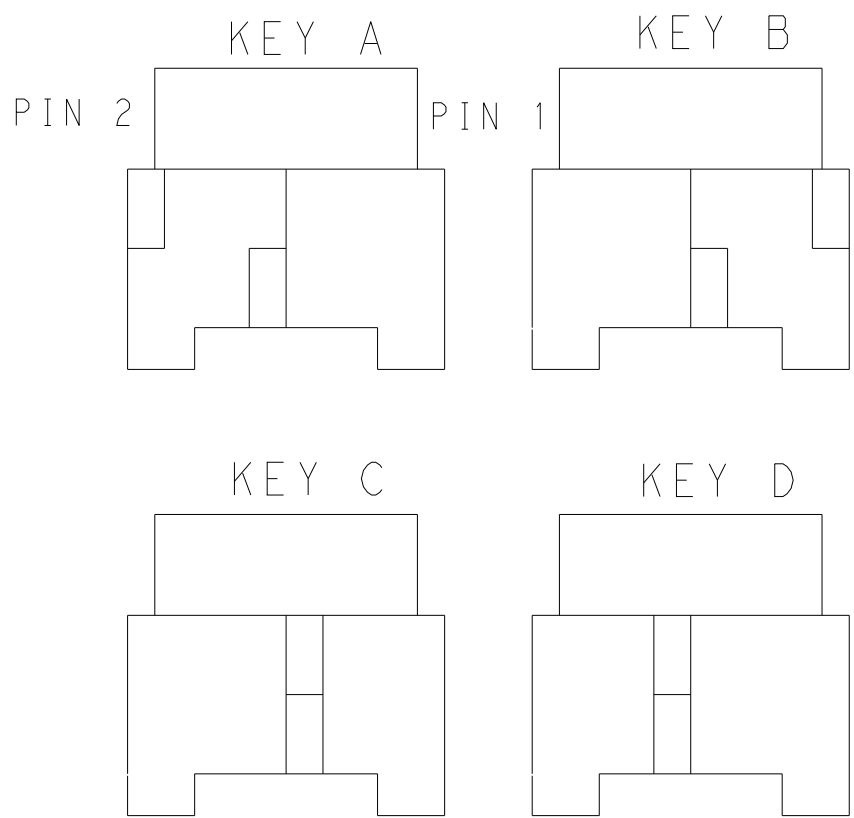

KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*3	LEVEL 1	KEY A	1-1971773-3
		KEY B	2-1971773-3
		KEY C	3-1971773-3
		KEY D	4-1971773-3
	LEVEL 2	KEY A	5-1971773-3
		KEY B	6-1971773-3
		KEY C	7-1971773-3
		KEY D	8-1971773-3
1*2	LEVEL 1	KEY A	1-1971773-2
		KEY B	2-1971773-2
		KEY C	3-1971773-2
		KEY D	4-1971773-2
	LEVEL 2	KEY A	9-1971773-2
		KEY B	6-1971773-2
		KEY C	7-1971773-2
		KEY D	8-1971773-2
POS.	MATERIAL	KEY	P/N

1*5	LEVEL 1	KEY A	1-1971773-7
		KEY B	2-1971773-7
		KEY C	3-1971773-7
		KEY D	4-1971773-7
	LEVEL 2	KEY A	5-1971773-7
		KEY B	6-1971773-7
		KEY C	7-1971773-7
		KEY D	8-1971773-7
1*4	LEVEL 1	KEY A	1-1971773-4
		KEY B	2-1971773-4
		KEY C	3-1971773-4
		KEY D	4-1971773-4
	LEVEL 2	KEY A	5-1971773-4
		KEY B	6-1971773-4
		KEY C	7-1971773-4
		KEY D	8-1971773-4
POS.	MATERIAL	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU		09JUL2012		TE Connectivity PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK -										
DIMENSIONS:		CHK	HAPYE WU		09JUL2012												
mm		APVD	YUHONG MAO		09JUL2012												
		PRODUCT SPEC															
		APPLICATION SPEC															
		114-106118															
TOLERANCES UNLESS OTHERWISE SPECIFIED:						SIZE					CAGE CODE		DRAWING NO		RESTRICTED TO		
0 PLC ±-						A					100779		C-1971773		-		
1 PLC ±-.35																	
2 PLC ±.0±.25																	
3 PLC ±-																	
4 PLC ±-																	
ANGLES ±-																	
FINISH																	
MATERIAL																	
-																	
</																	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[9-1971773-2](#)